US010916231B2

(12) **United States Patent**
Pelleg et al.

(10) **Patent No.: US 10,916,231 B2**
(45) **Date of Patent: Feb. 9, 2021**

(54) **REVERBERATING PERCUSSION INSTRUMENT**

(71) Applicant: **SoundFreq LTD**, Tel Aviv (IL)

(72) Inventors: **Ortal Pelleg**, Netanya (IL); **Ido Luxman**, Tel Aviv (IL)

(73) Assignee: **SOUNDFREQ LTD.**, Tel Aviv (IL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/975,966**

(22) PCT Filed: **Feb. 27, 2019**

(86) PCT No.: **PCT/IL2019/050220**
§ 371 (c)(1),
(2) Date: **Aug. 26, 2020**

(87) PCT Pub. No.: **WO2019/167041**
PCT Pub. Date: **Sep. 6, 2019**

(65) **Prior Publication Data**

US 2020/0402491 A1 Dec. 24, 2020

(30) **Foreign Application Priority Data**

Feb. 28, 2018 (IL) 257804

(51) **Int. Cl.**
G10H 1/00 (2006.01)
G10H 3/14 (2006.01)
G10D 13/10 (2020.01)

(52) **U.S. Cl.**
CPC ***G10H 3/146*** (2013.01); ***G10D 13/25*** (2020.02); ***G10D 13/28*** (2020.02)

(58) **Field of Classification Search**
CPC G10H 3/146; G10D 13/28; G10D 13/25
USPC 84/600
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,458,193 A * 1/1949 Packheiser G10D 13/08 84/403
3,174,382 A 3/1965 Gugelot et al.
3,589,233 A * 6/1971 Rowe, Sr. G10H 3/20 84/402
3,896,696 A 7/1975 Waters
4,469,003 A * 9/1984 Phelps G10D 13/08 84/404

(Continued)

FOREIGN PATENT DOCUMENTS

FR 2744553 8/1997

OTHER PUBLICATIONS


International Search Report and Written Opinion issued in PCT/IL2019/050220 dated May 19, 2019.

Primary Examiner — Jianchun Qin
(74) *Attorney, Agent, or Firm* — Snell & Wilmer LLP

(57) **ABSTRACT**

A reverberating percussion instrument has a resonating chamber of a completely smoothly contoured configuration to facilitate generation of long-duration pitched reverberations, and a plurality of hollow and substantially mutually parallel vibratable tubes of different lengths, each of which being suspended from an element of the resonating chamber by a tensioned filament at each longitudinal end thereof. Reverberated and resonating musical sounds are directed forwardly from the resonating chamber in response to selective vibration of one or more of the tubes.

13 Claims, 10 Drawing Sheets

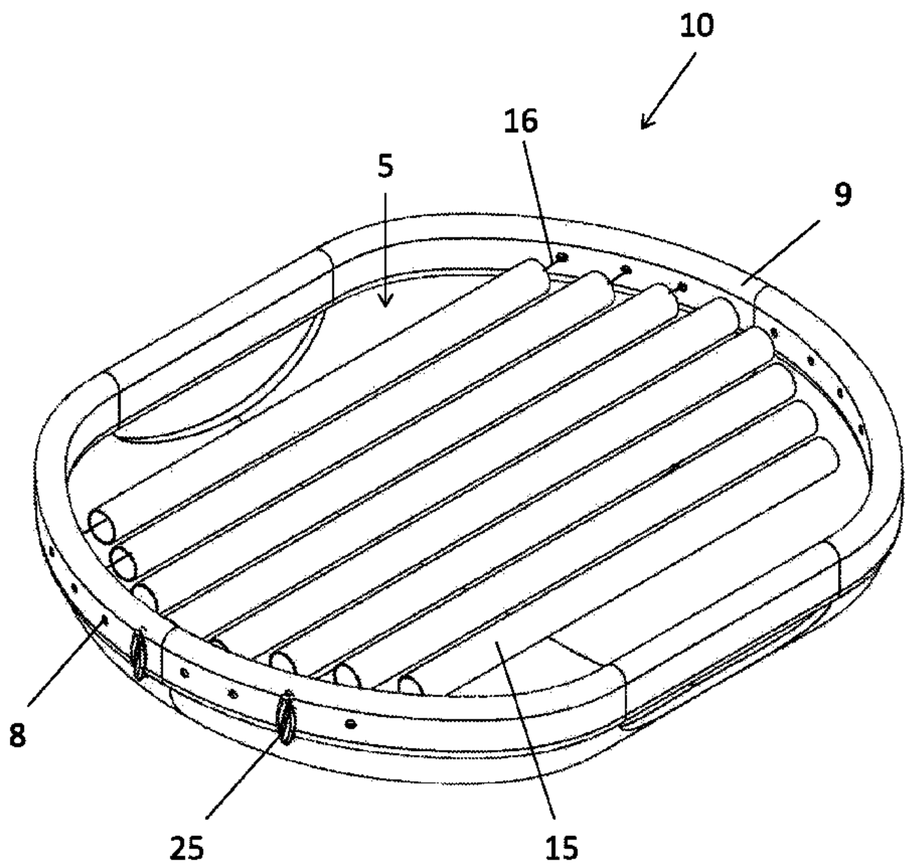

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,334,797	A *	8/1994	Niedge	G10F 1/06 84/86
9,773,482	B2 *	9/2017	Keller	G10D 13/08

* cited by examiner

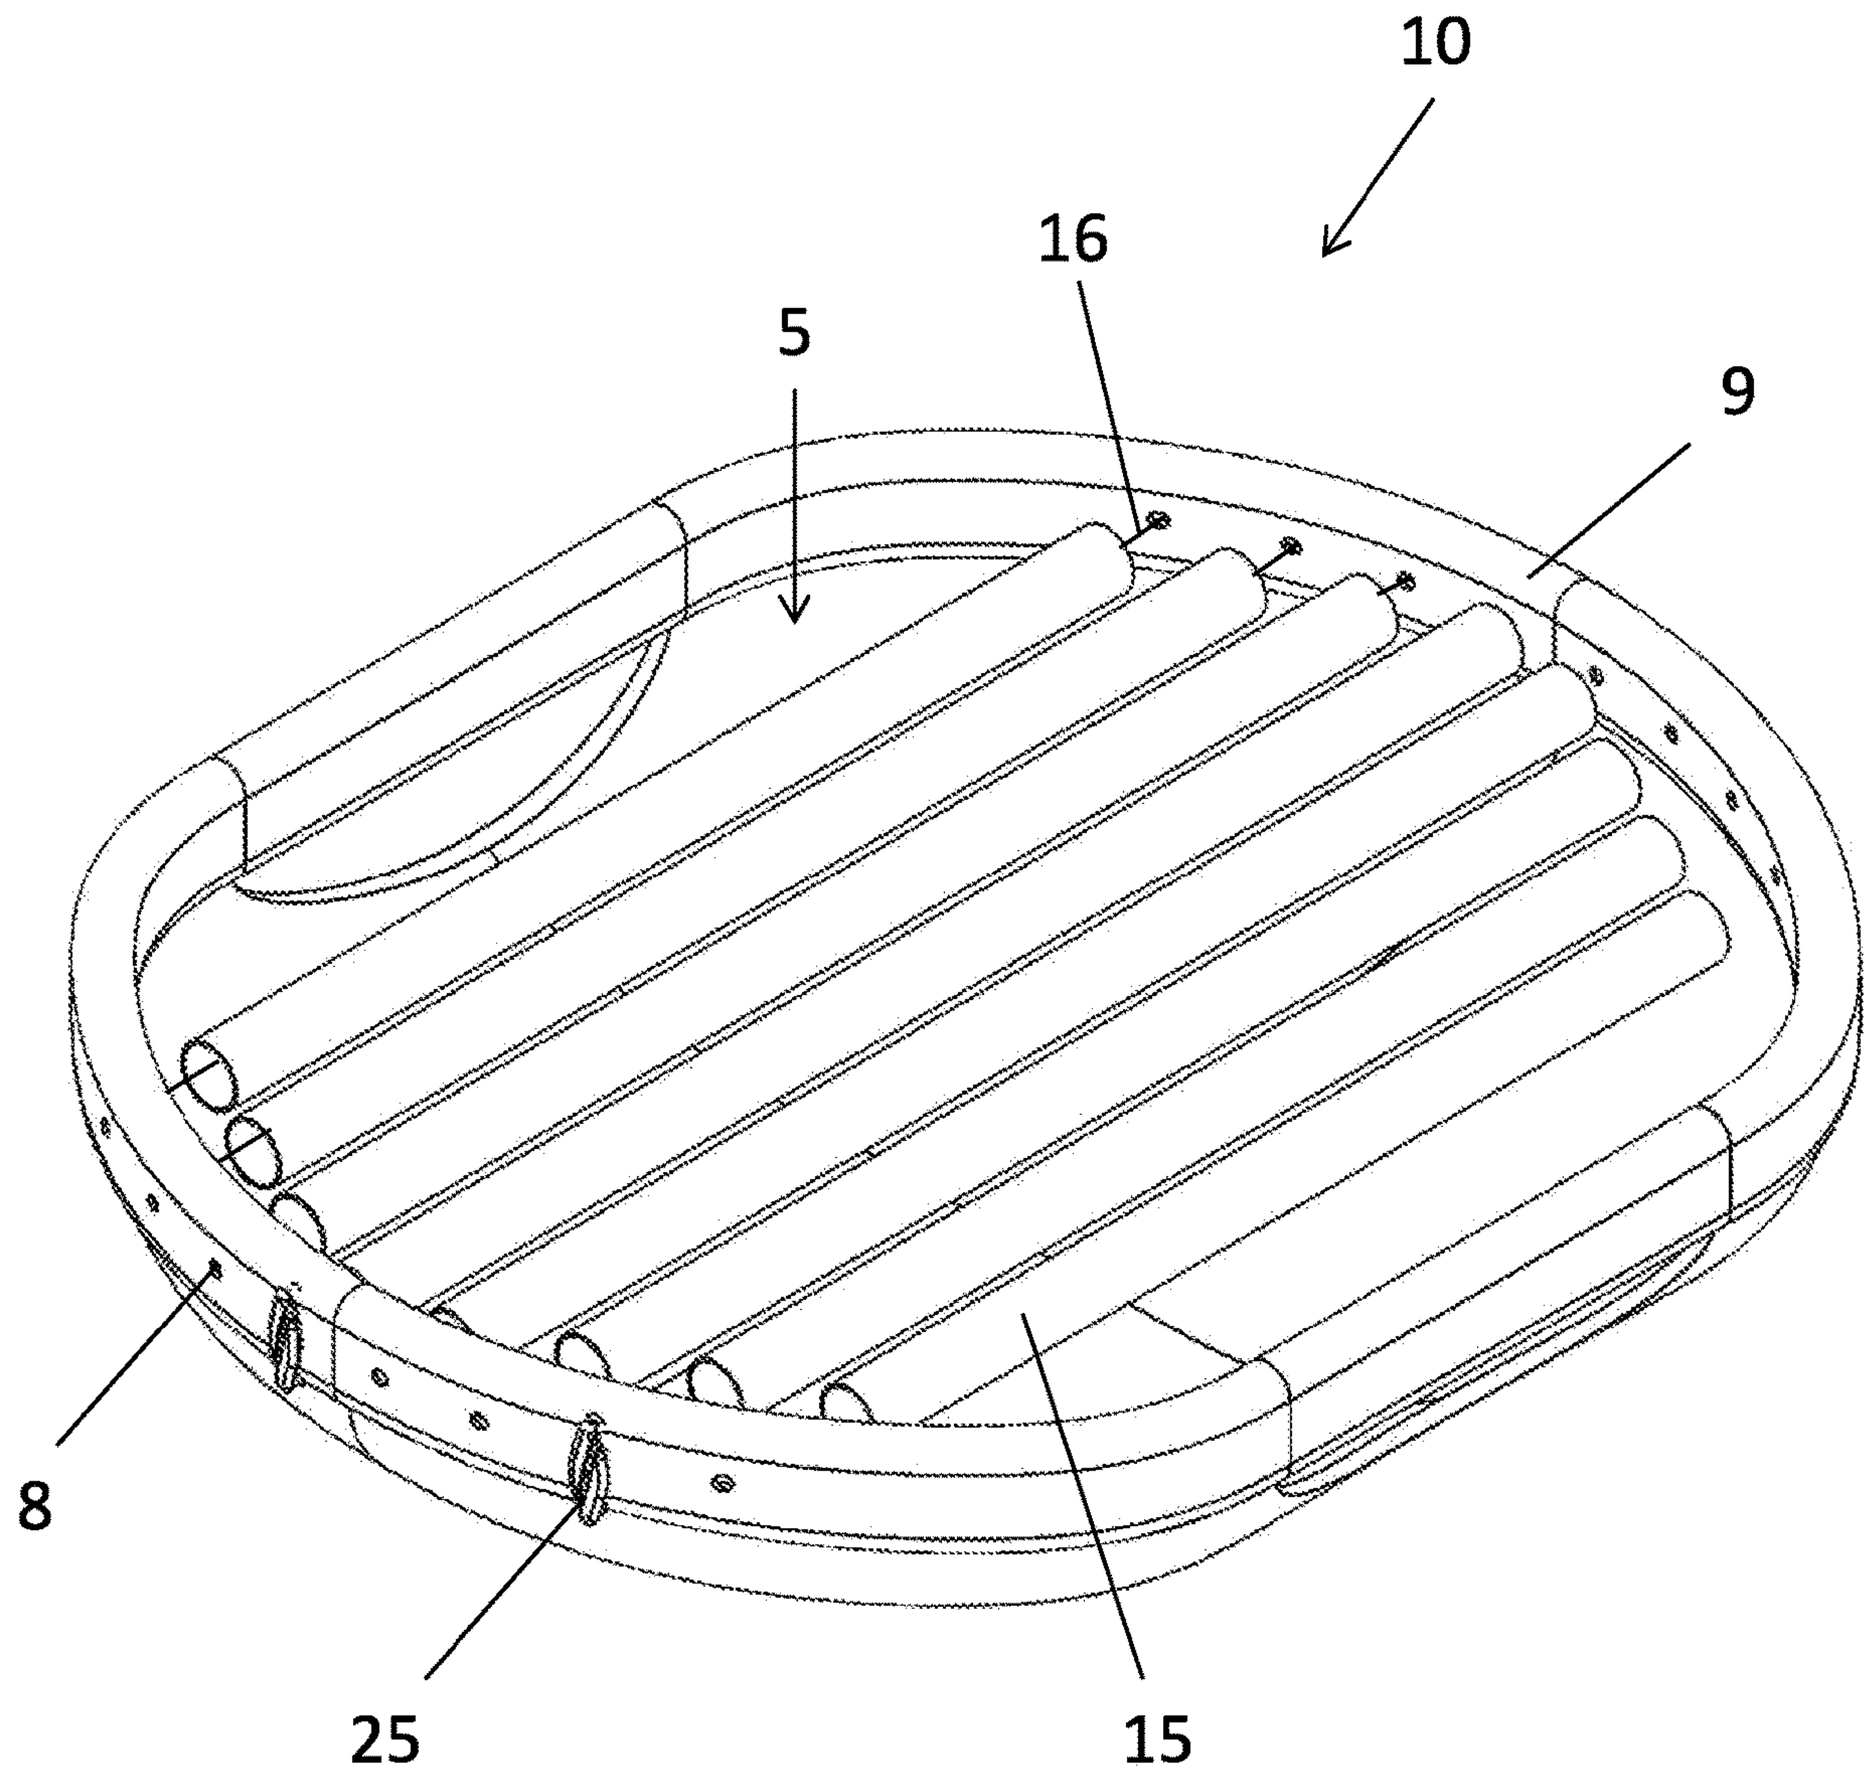


Fig. 1

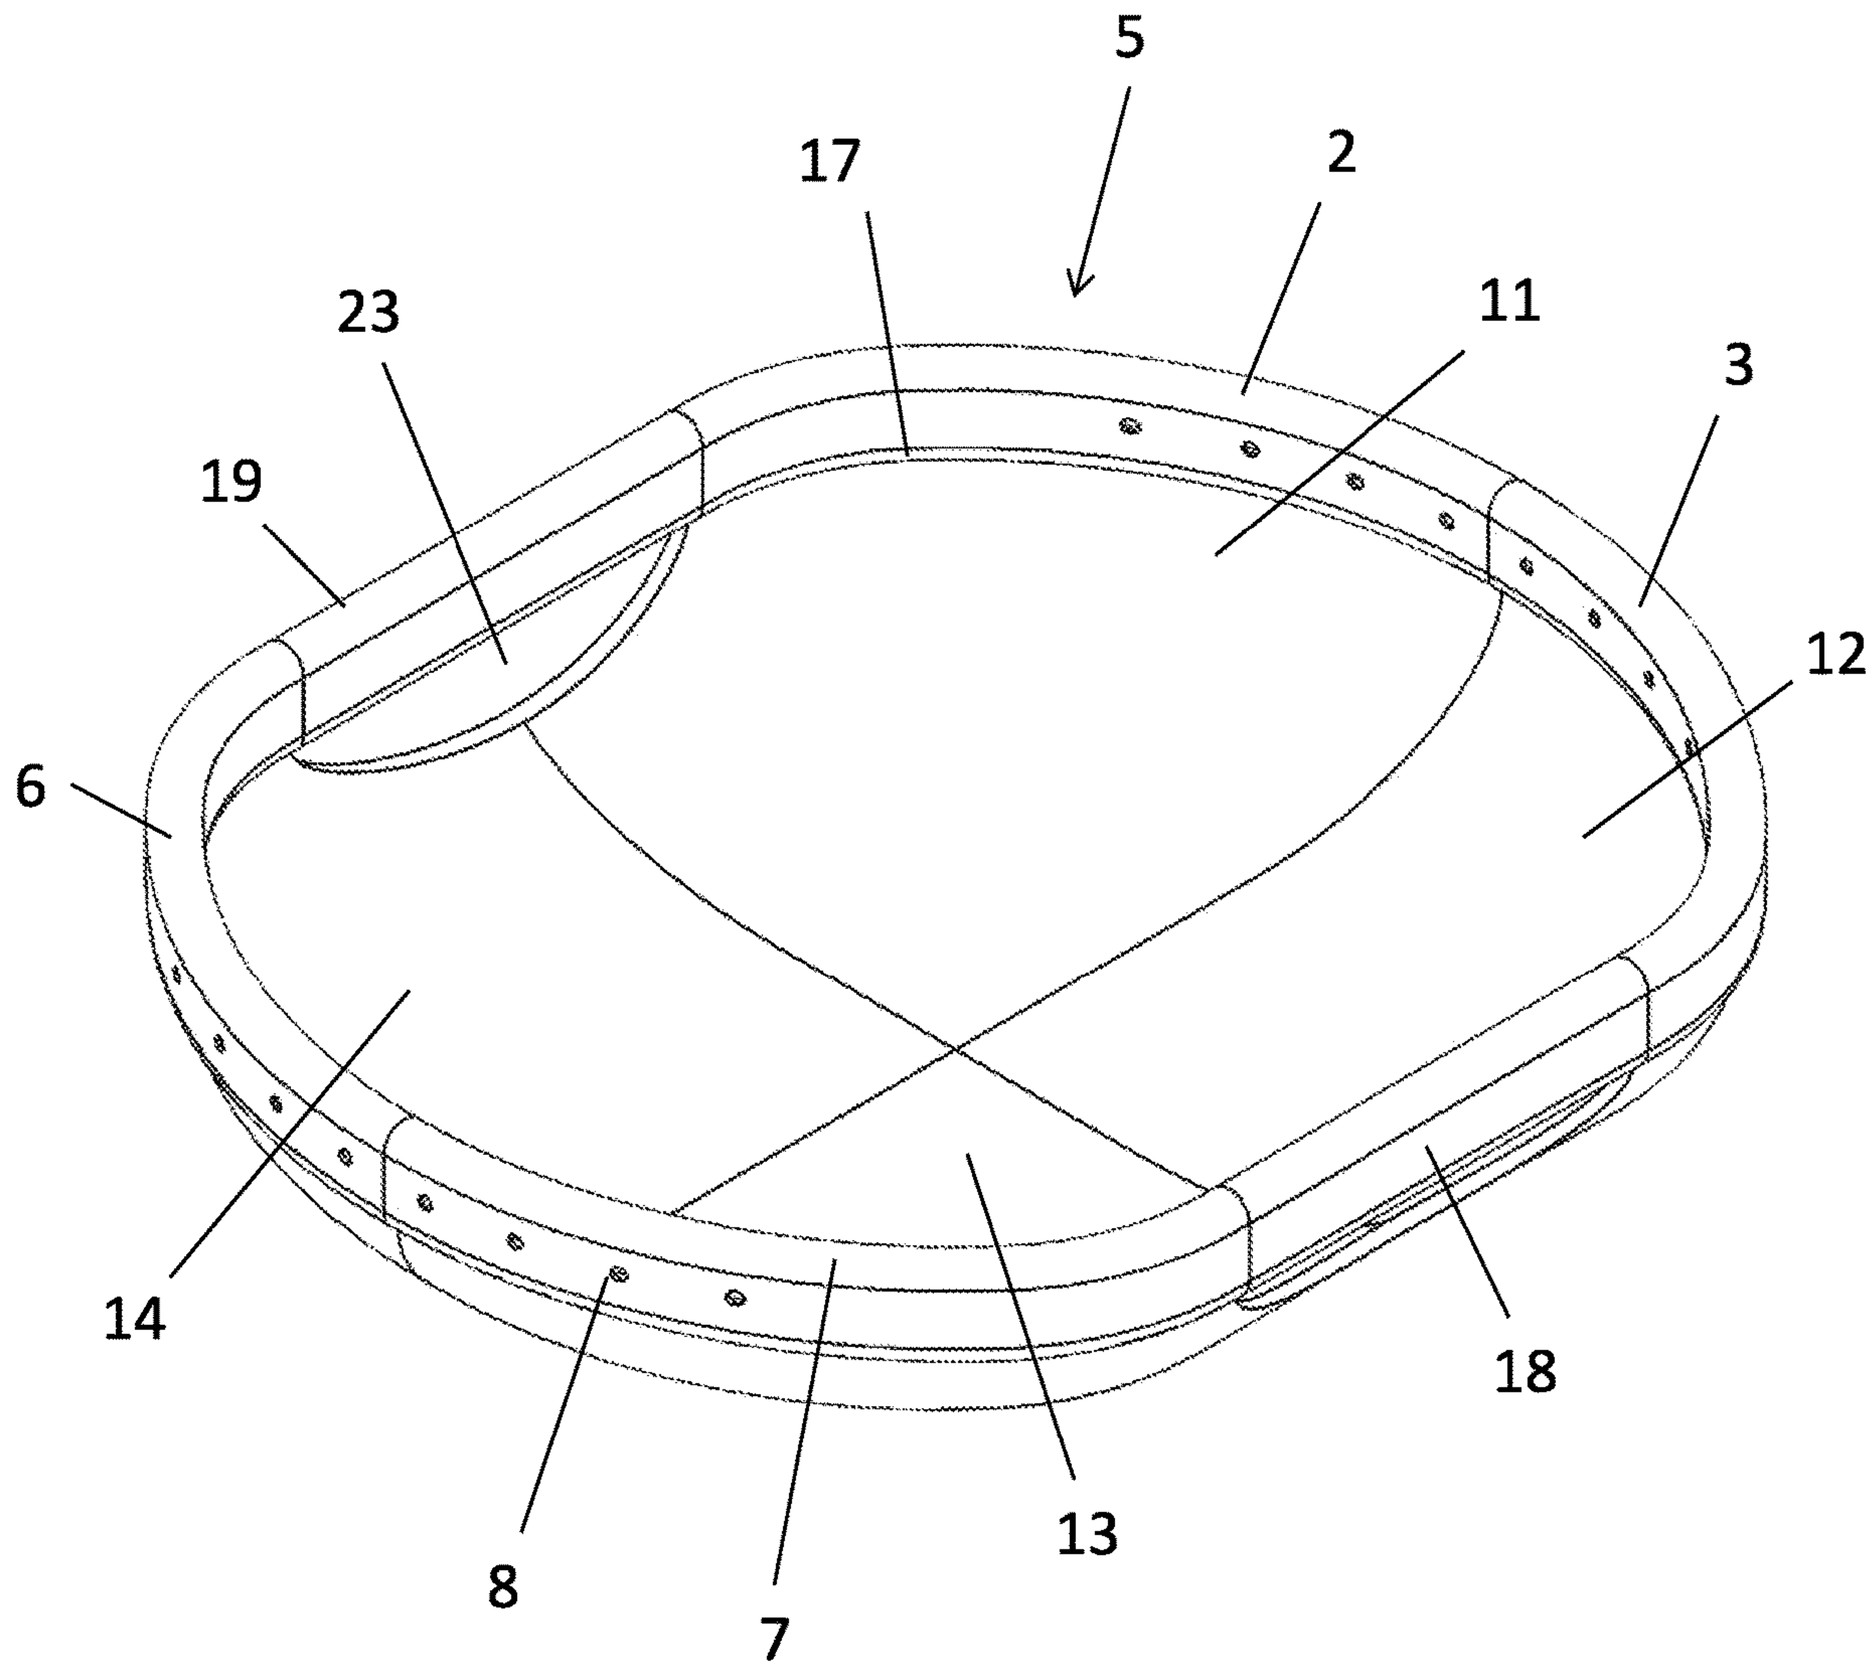


Fig. 2

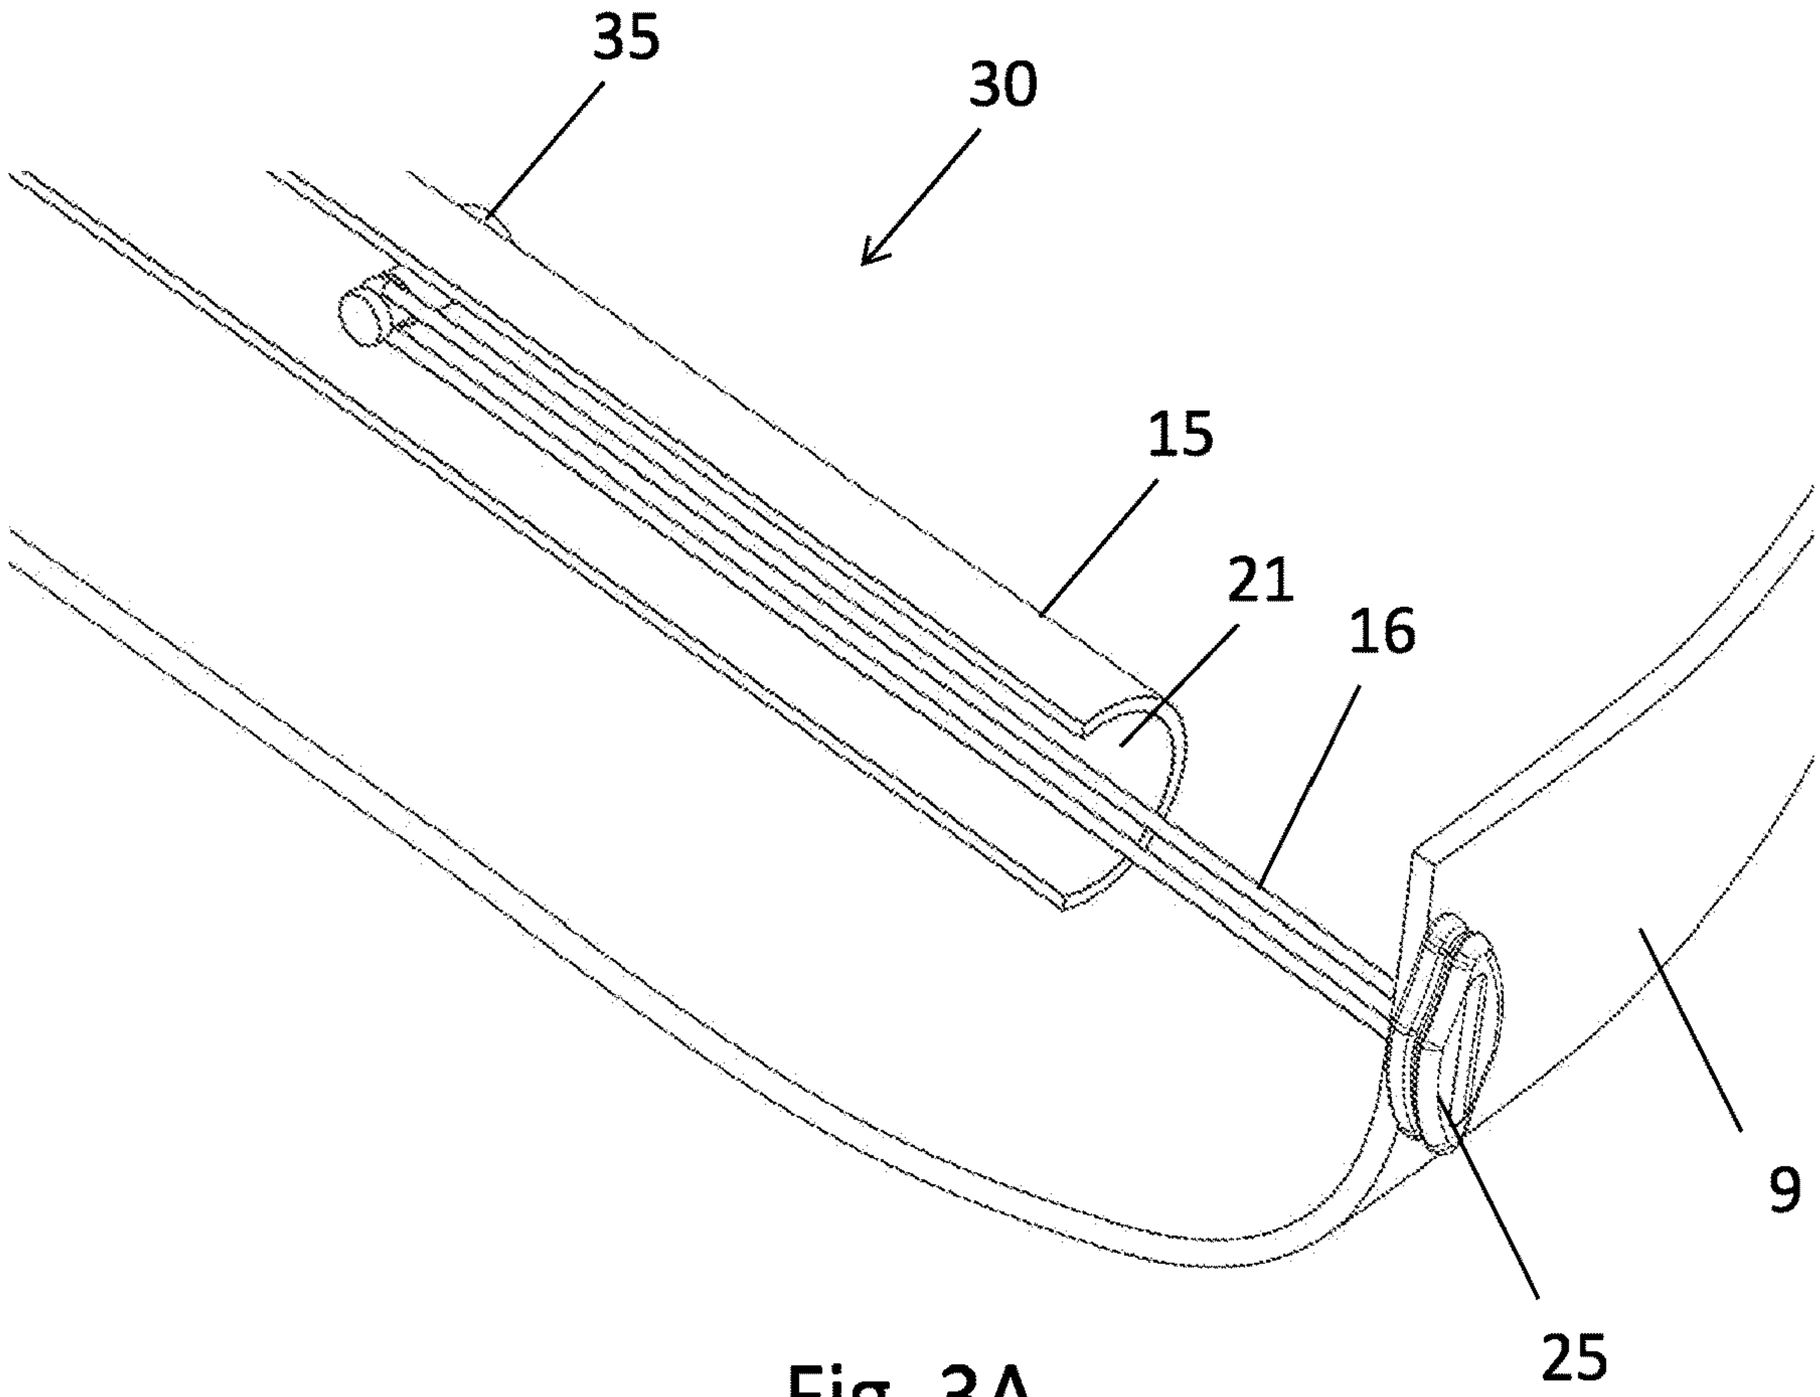


Fig. 3A

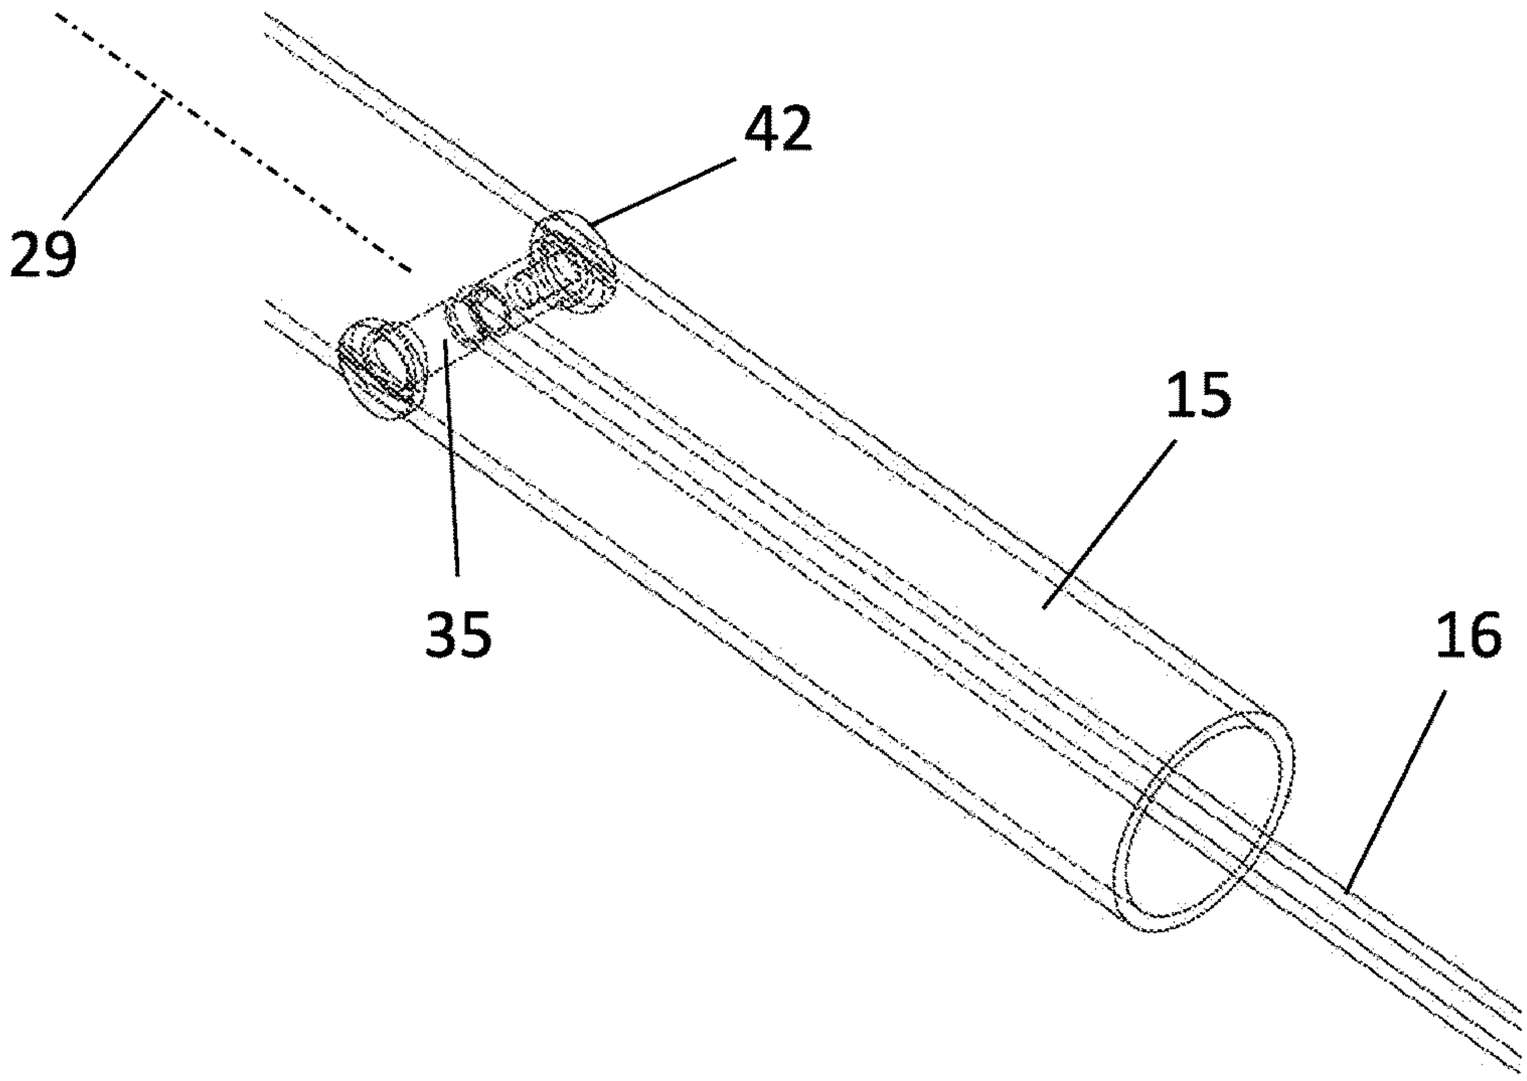


Fig. 3B

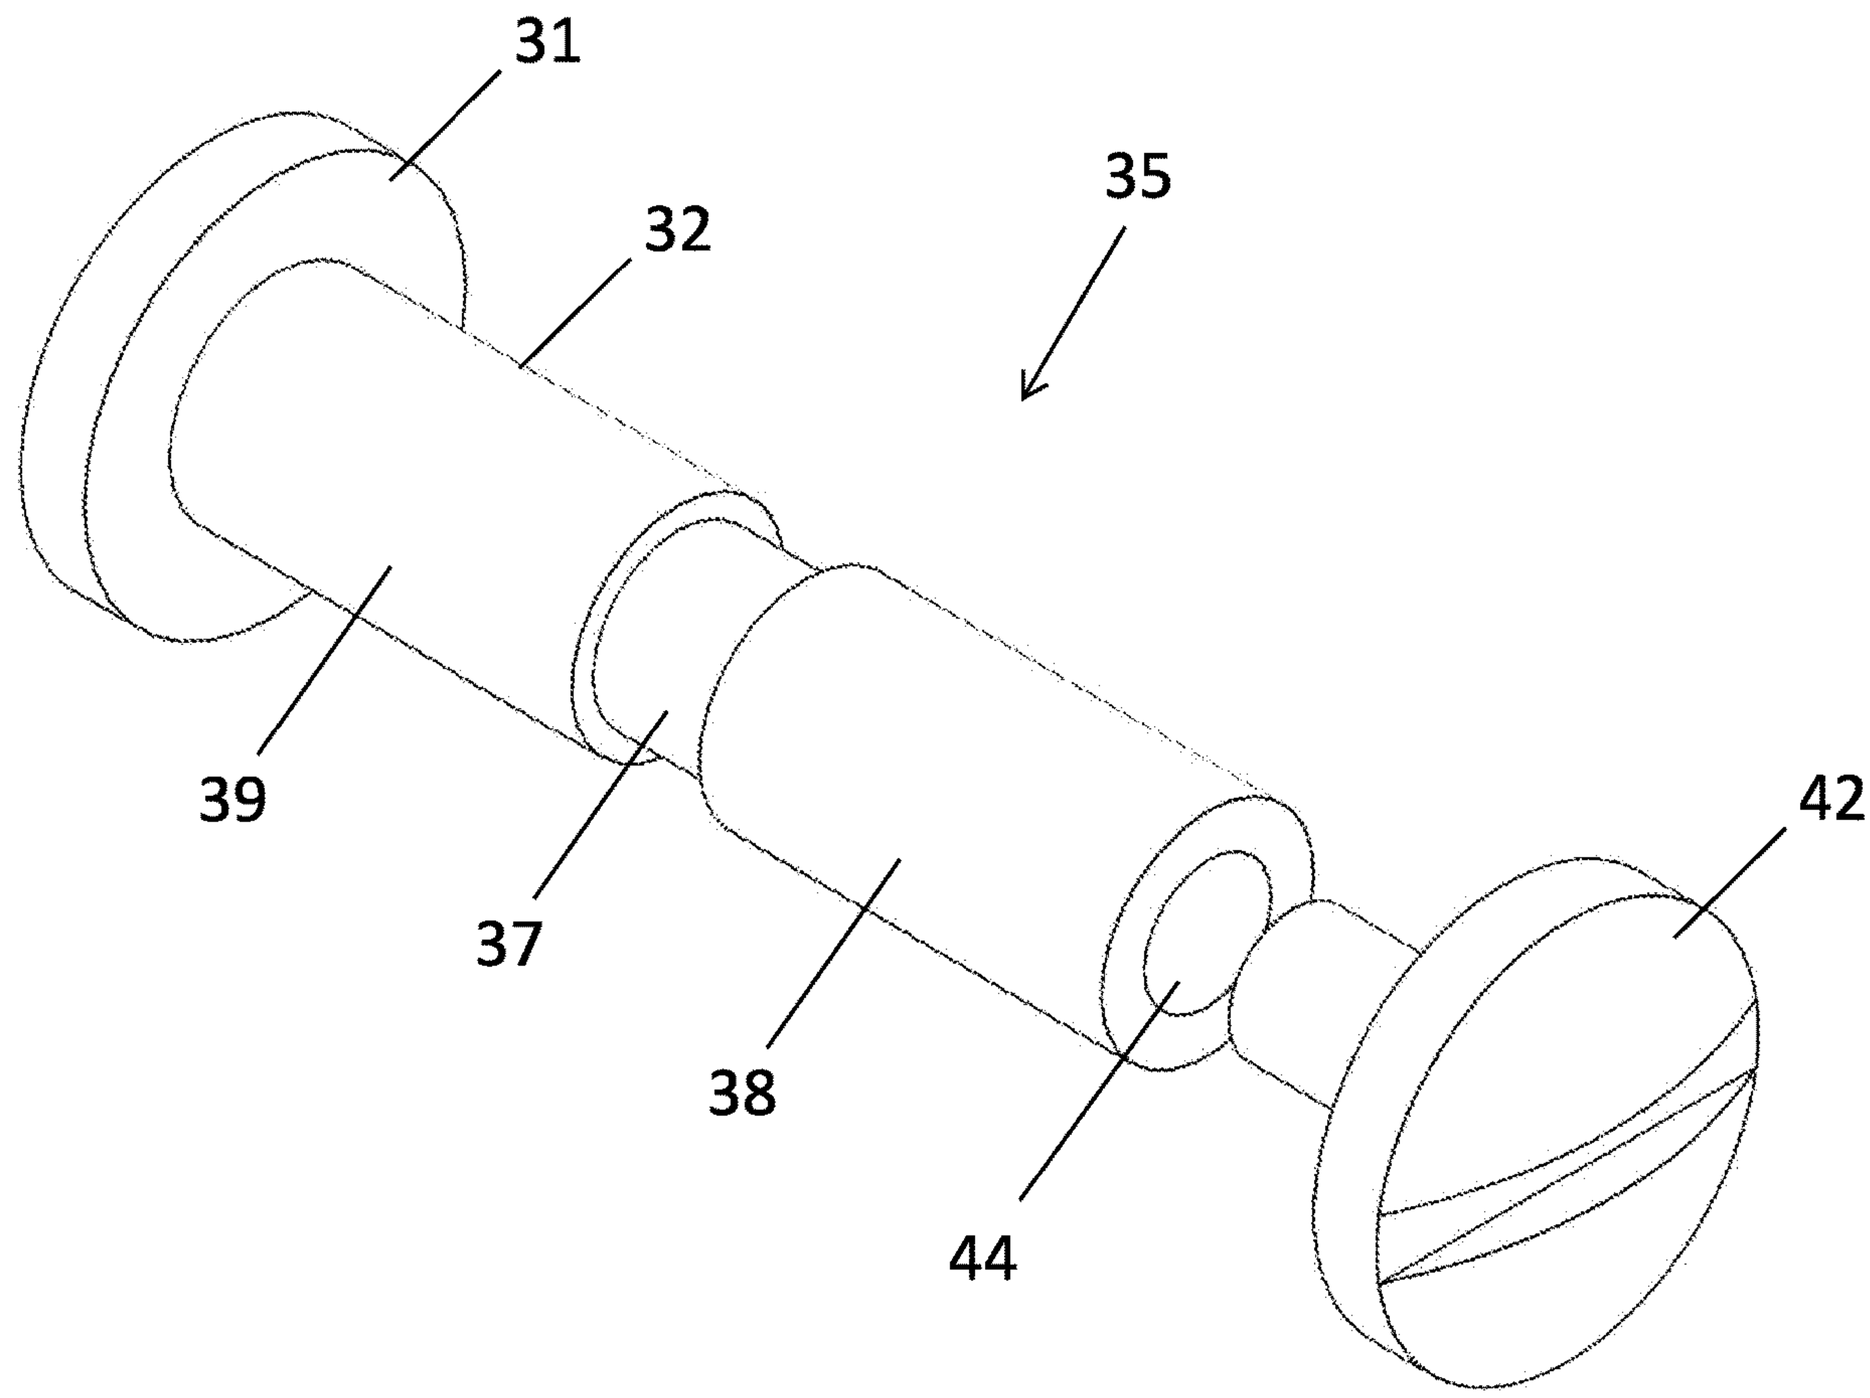


Fig. 4

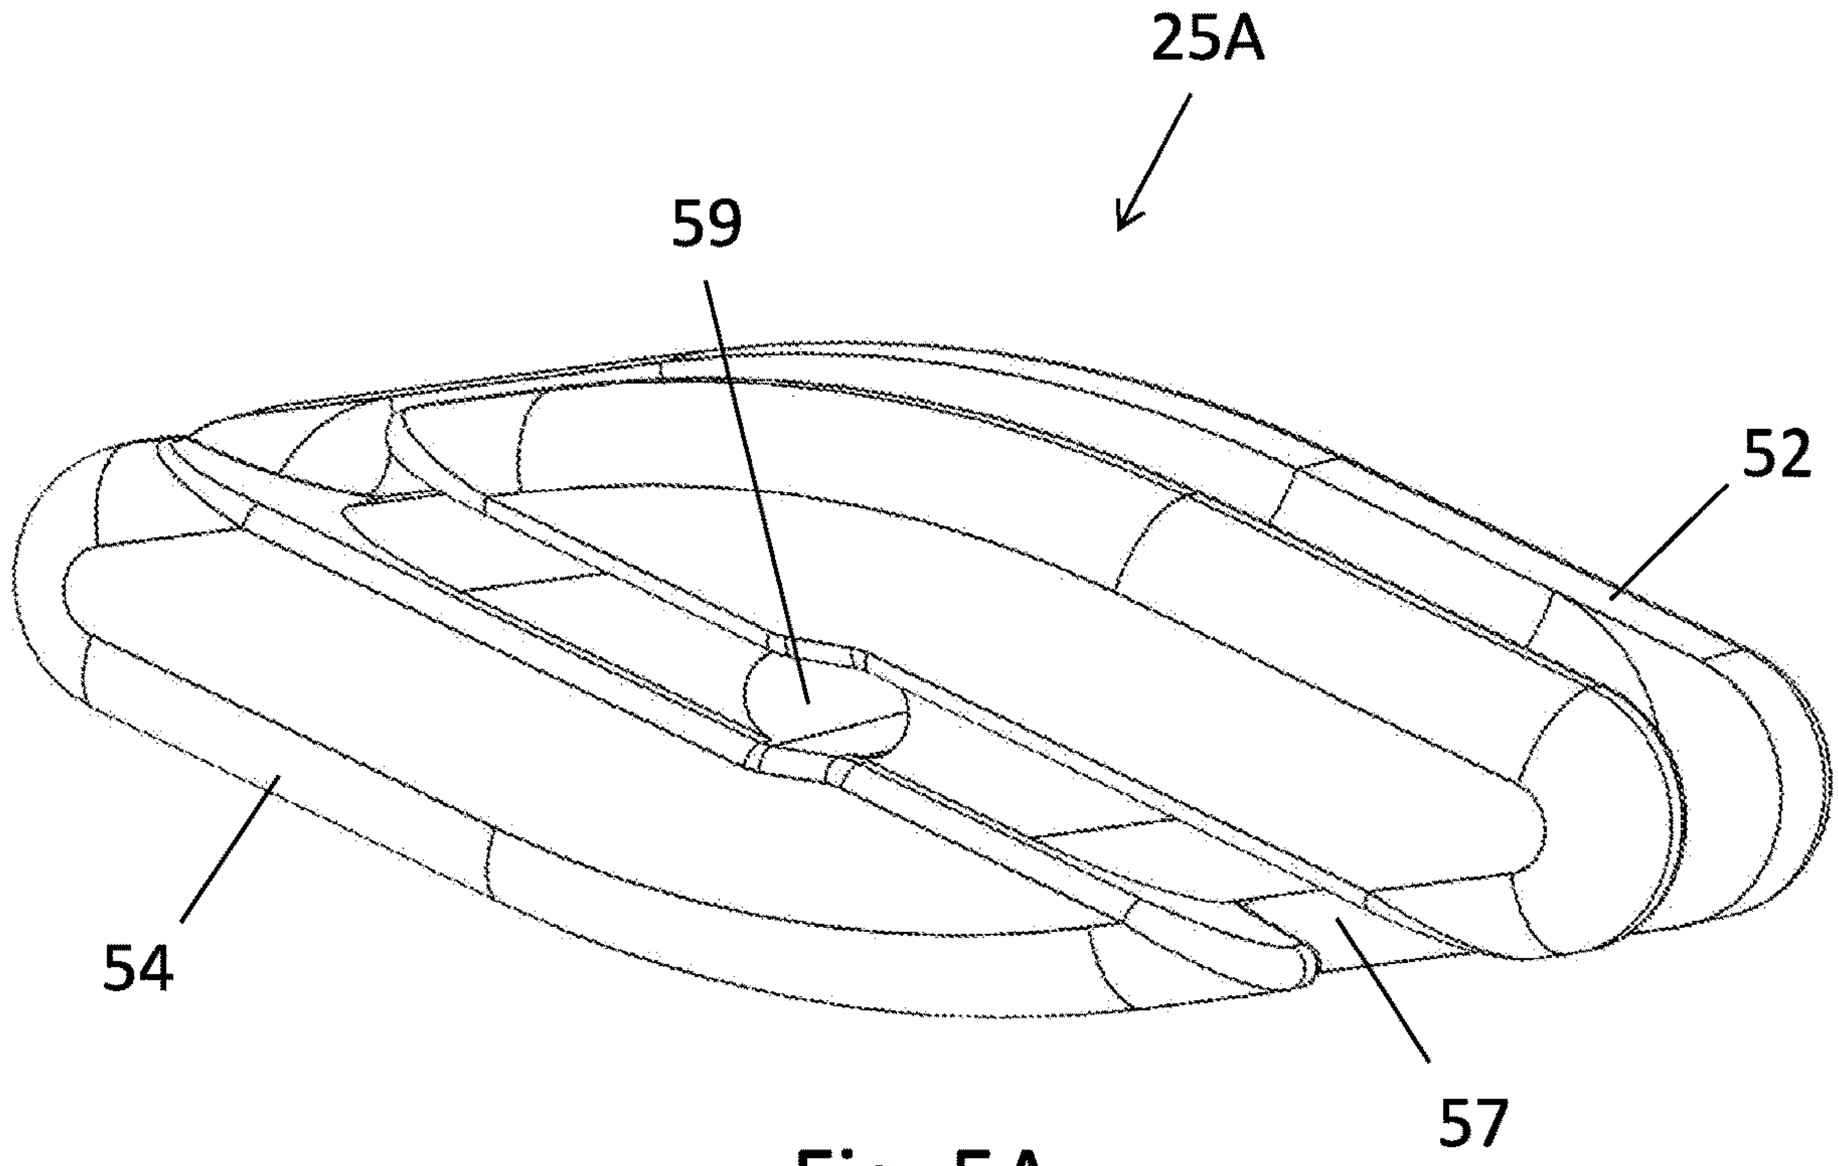


Fig. 5A

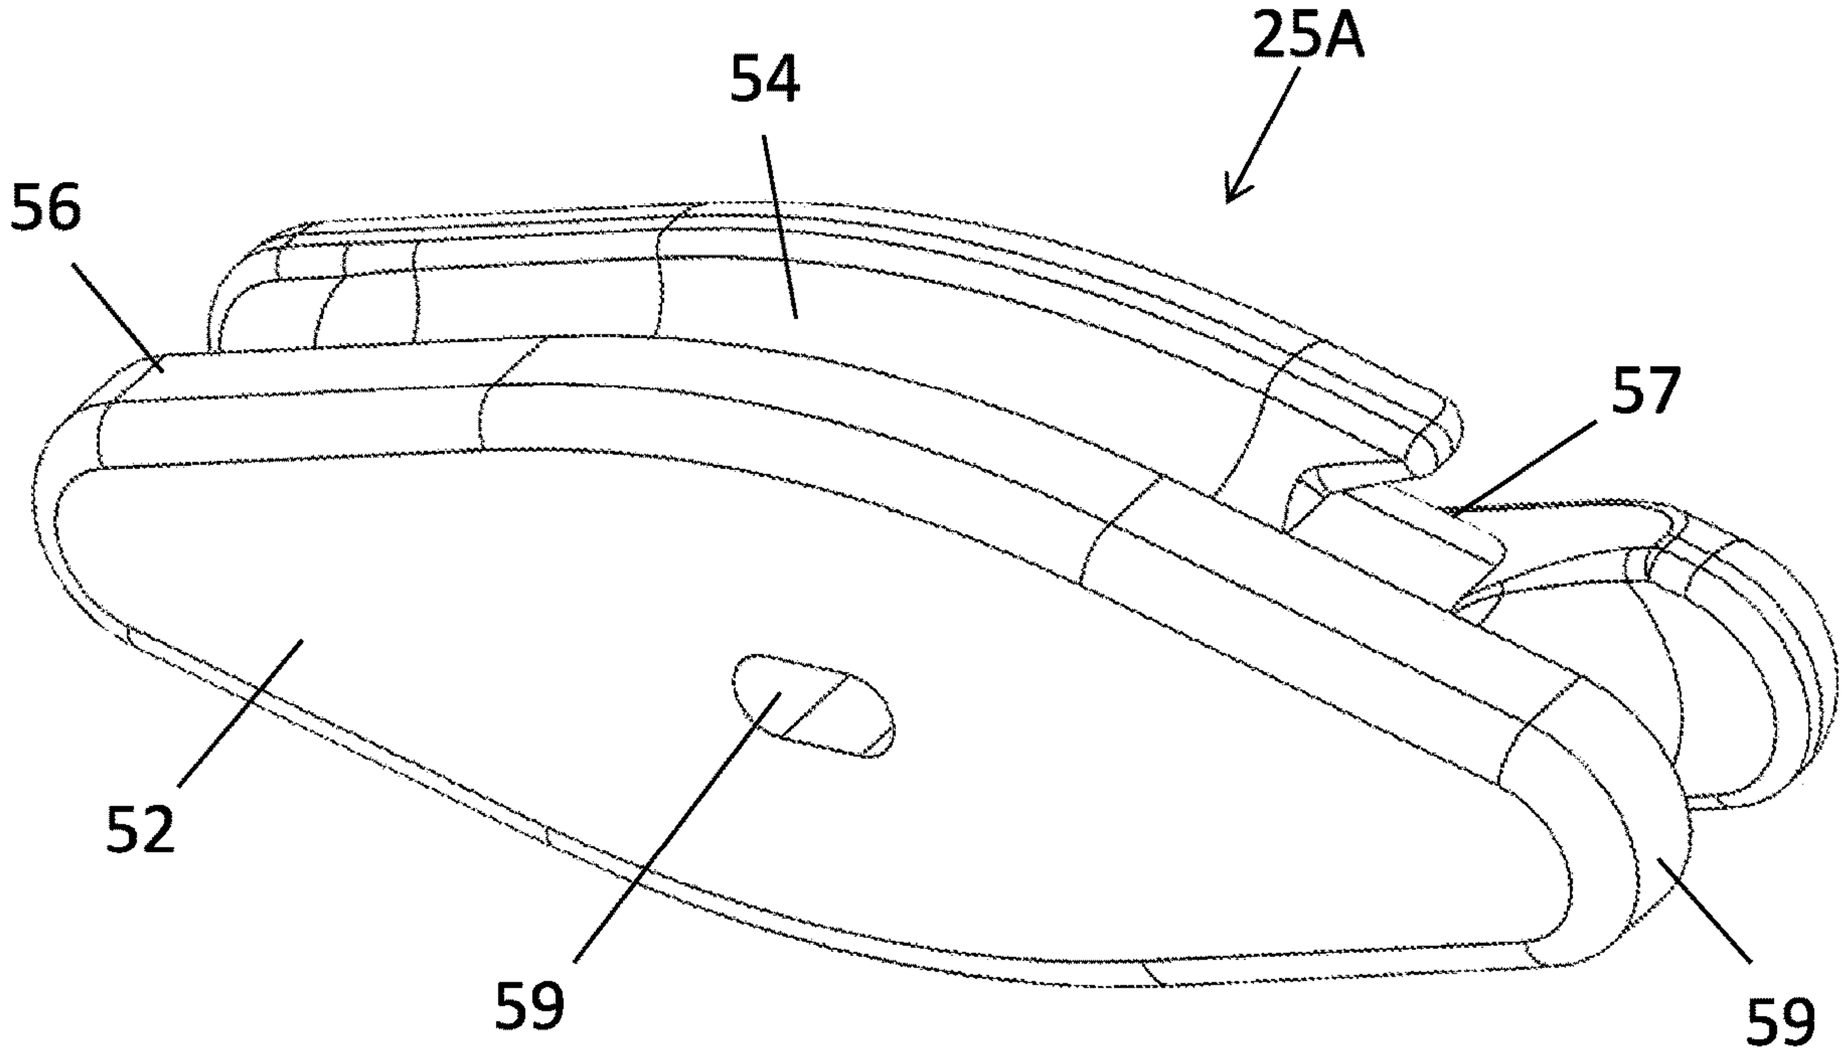


Fig. 5B

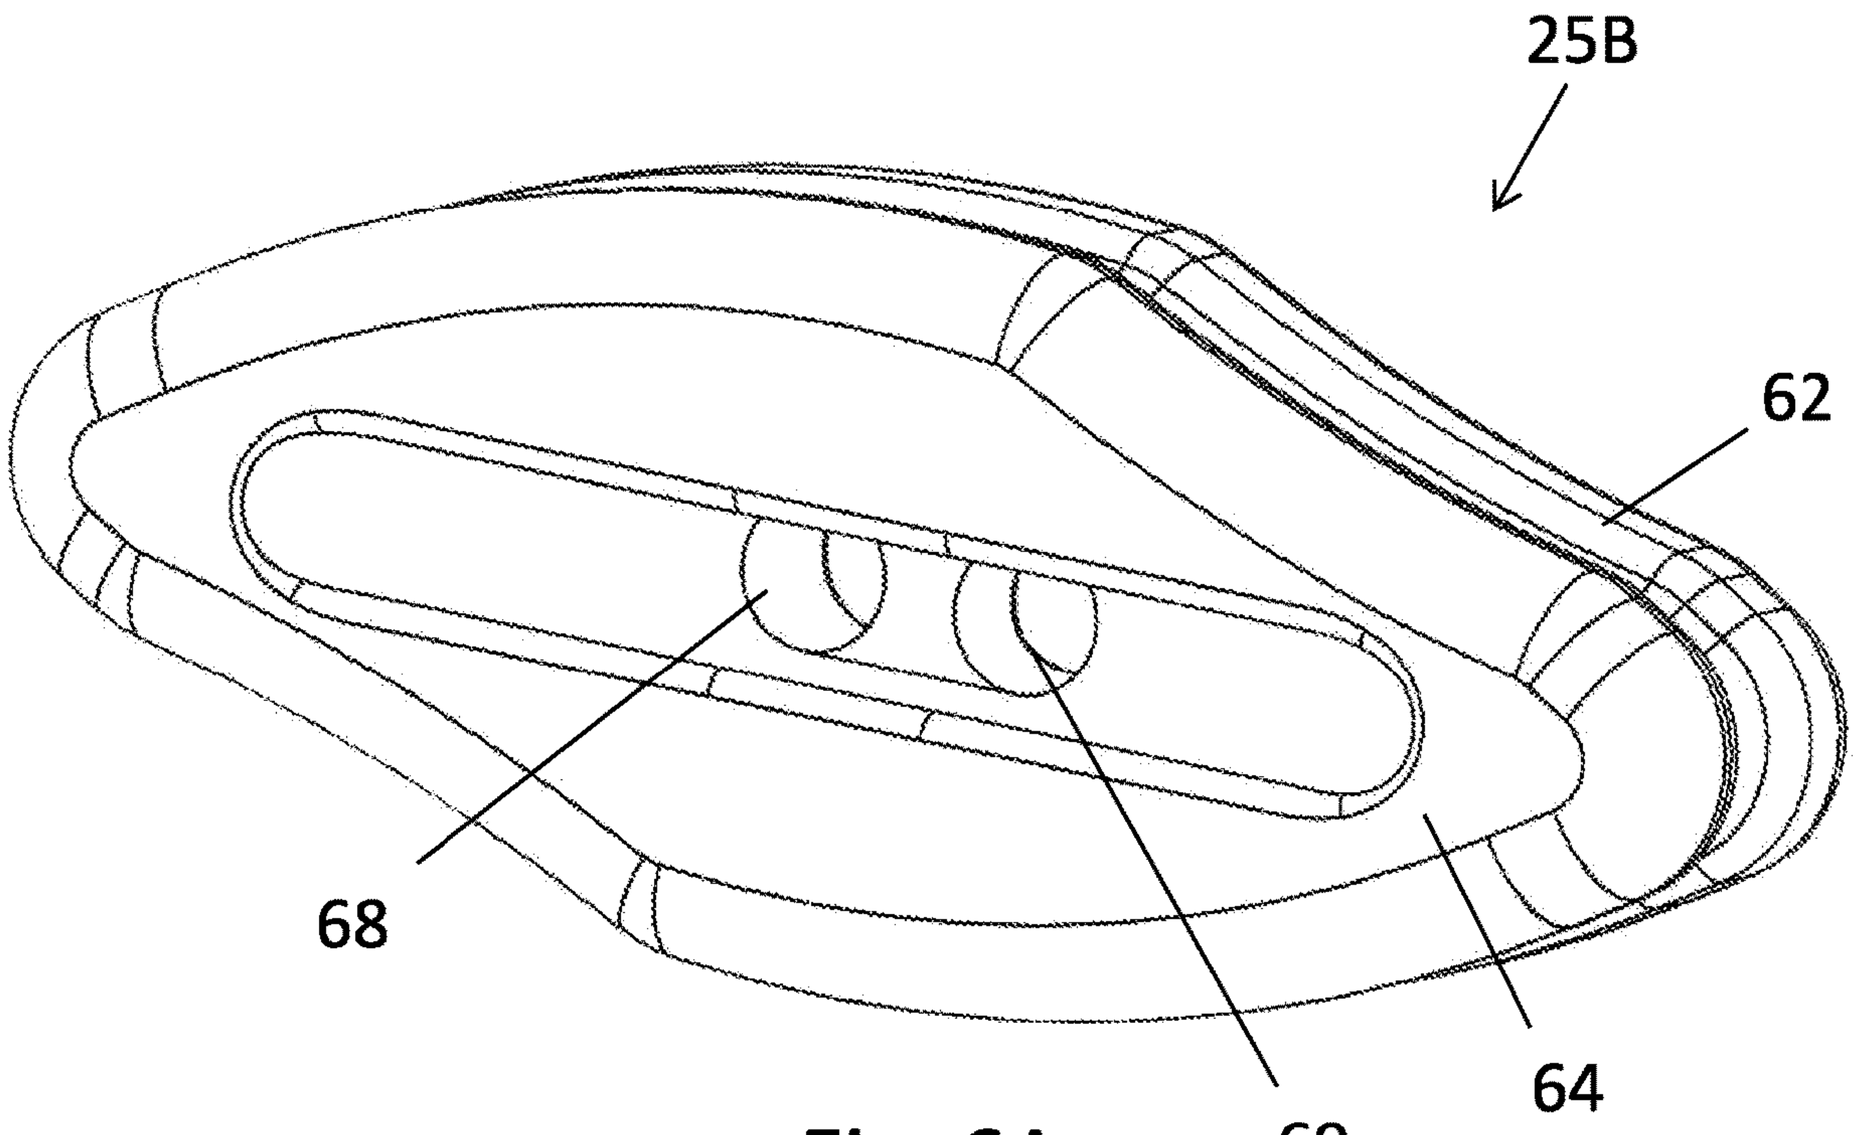


Fig. 6A

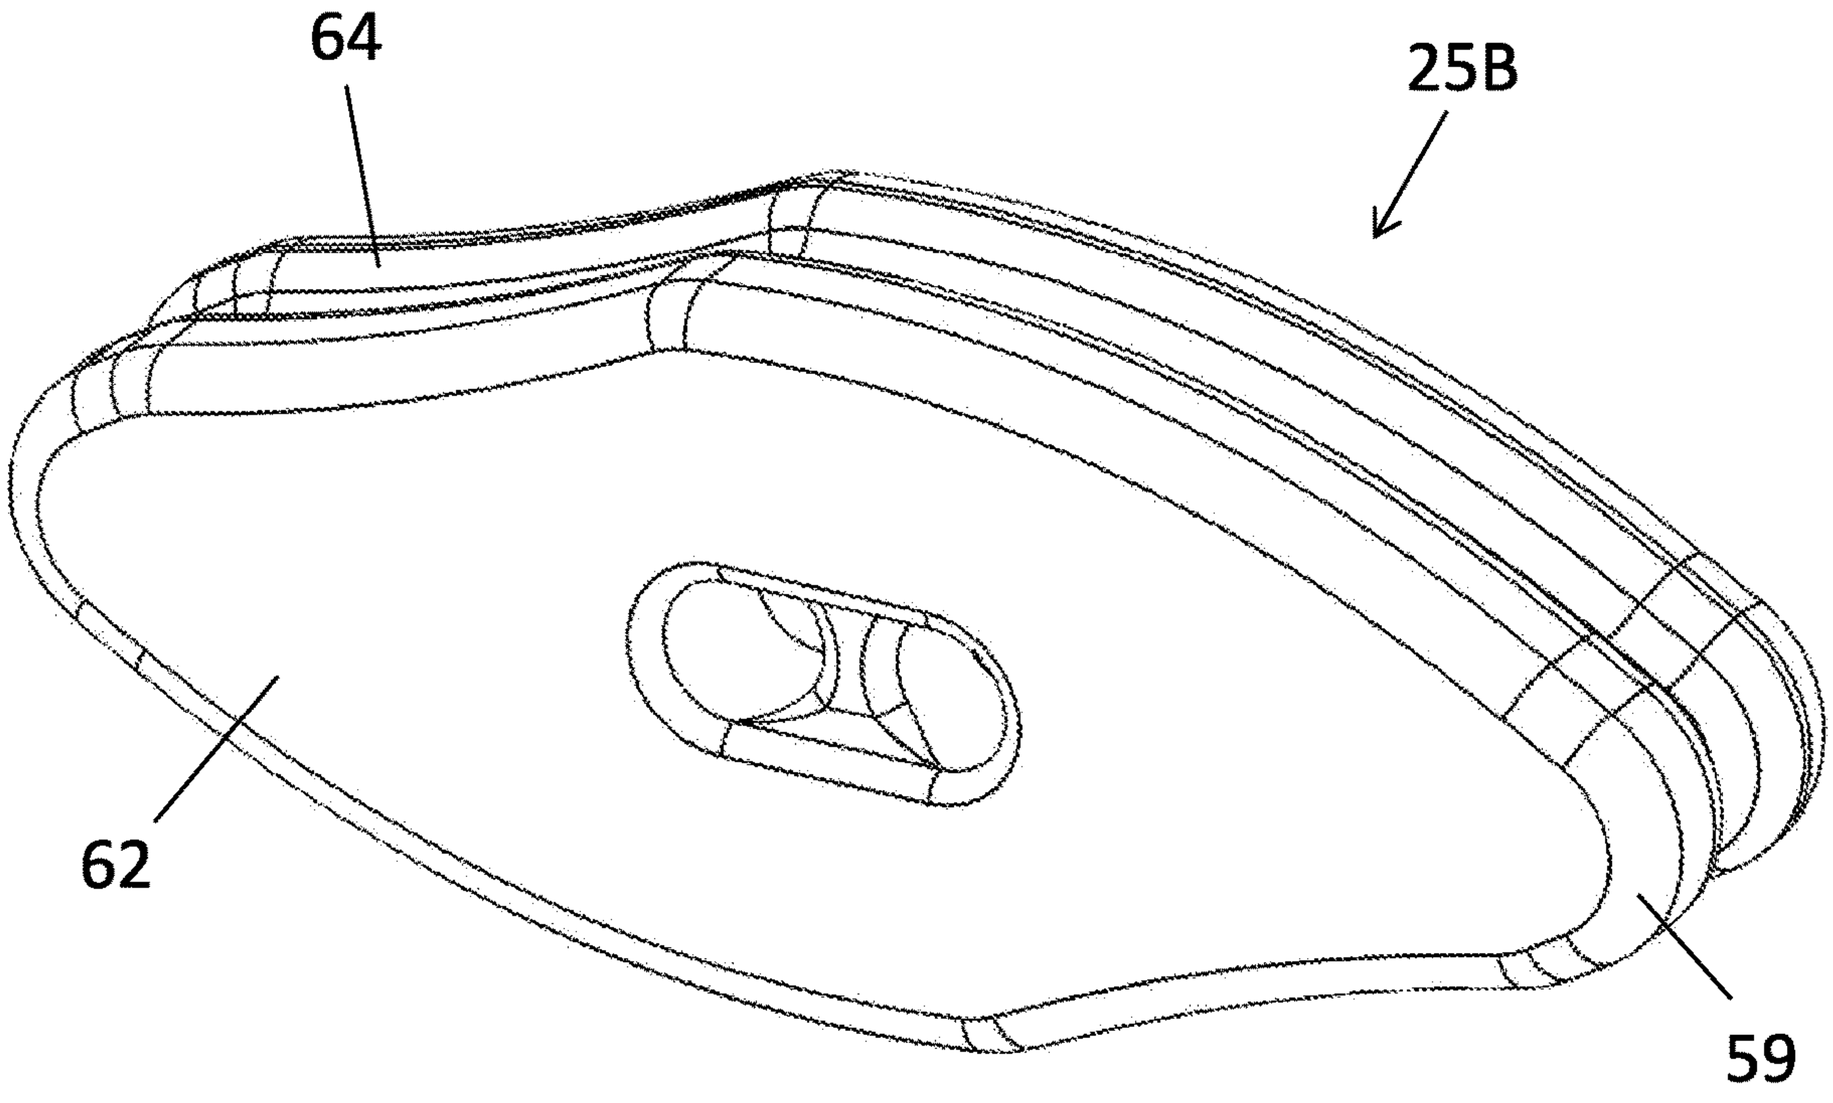


Fig. 6B

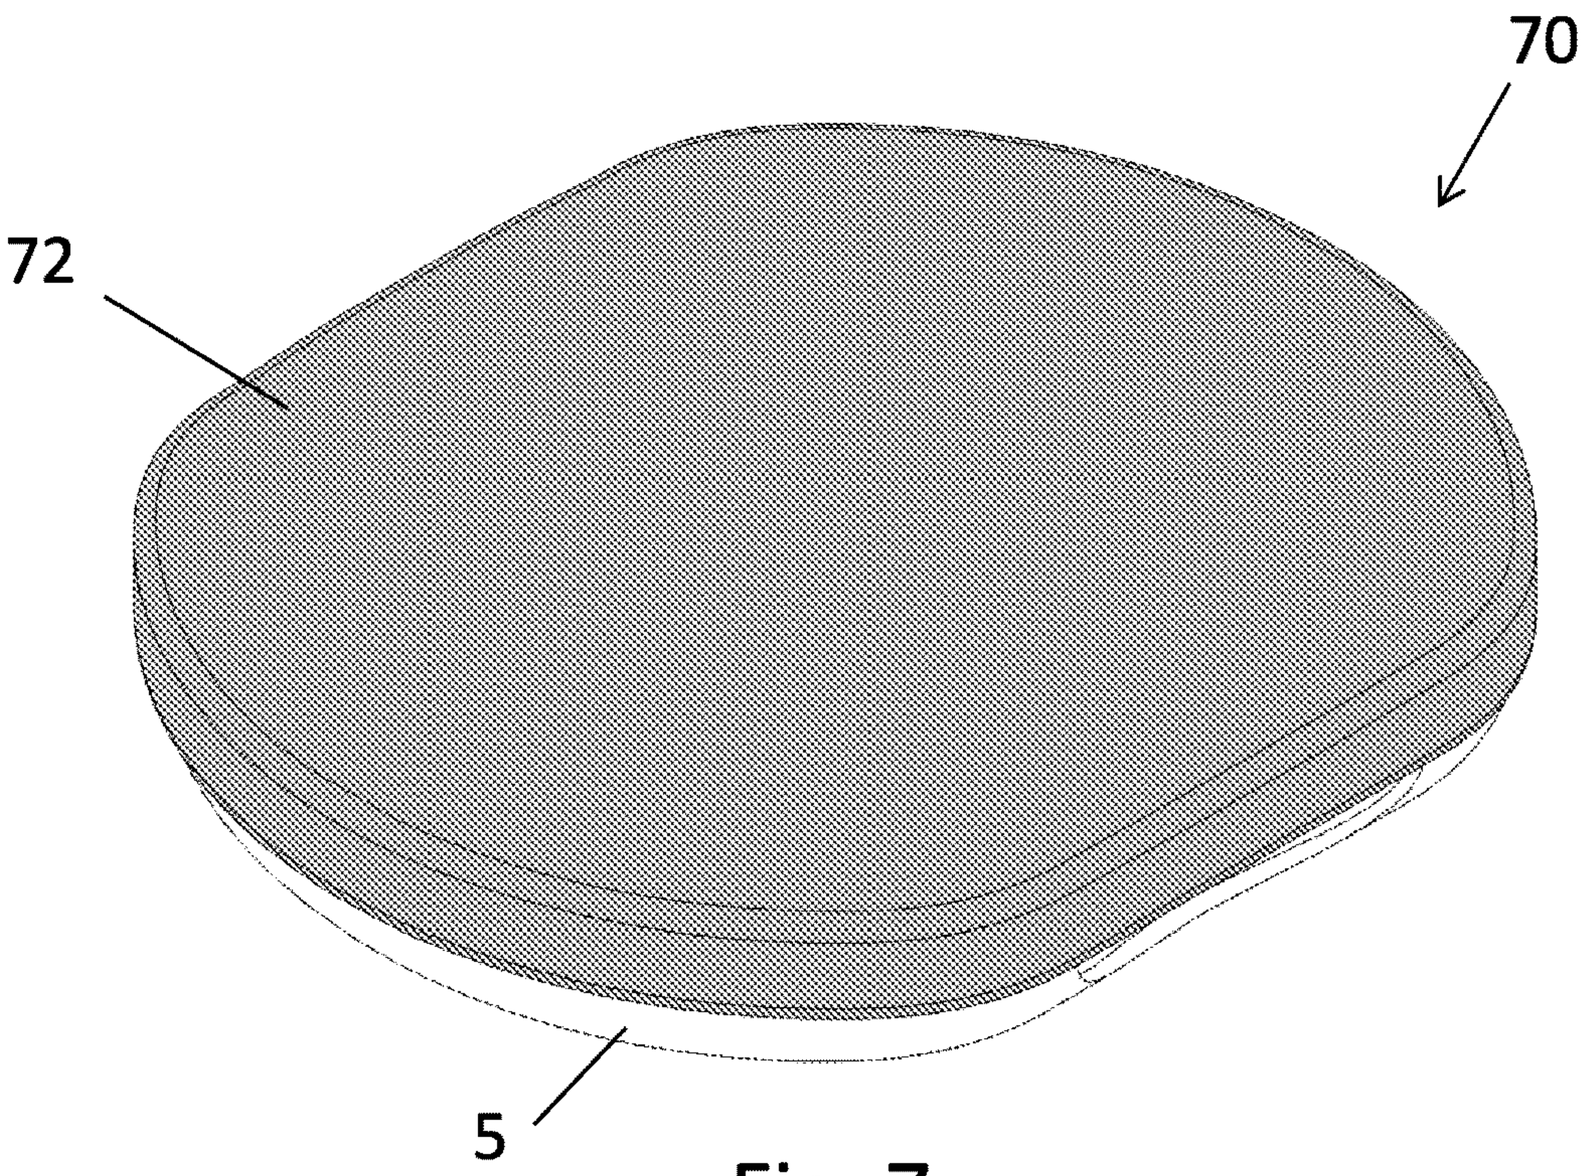


Fig. 7

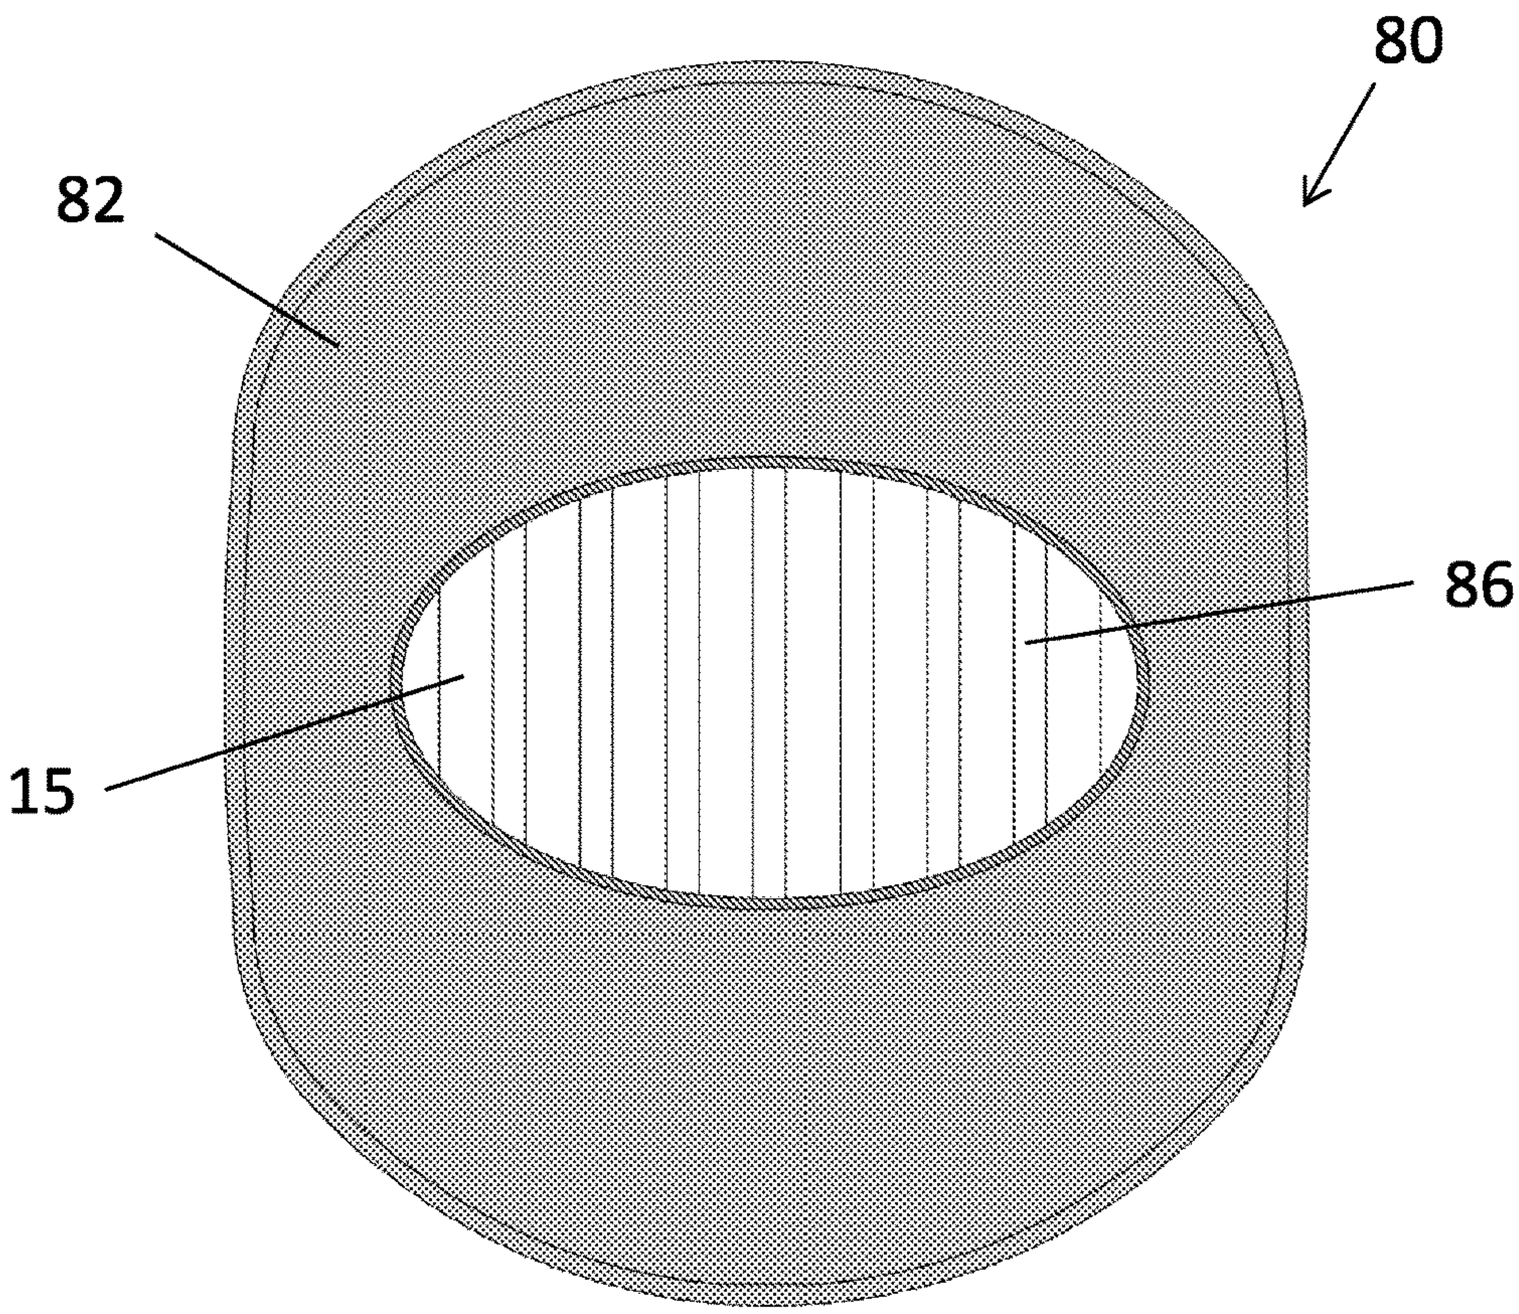


Fig. 8

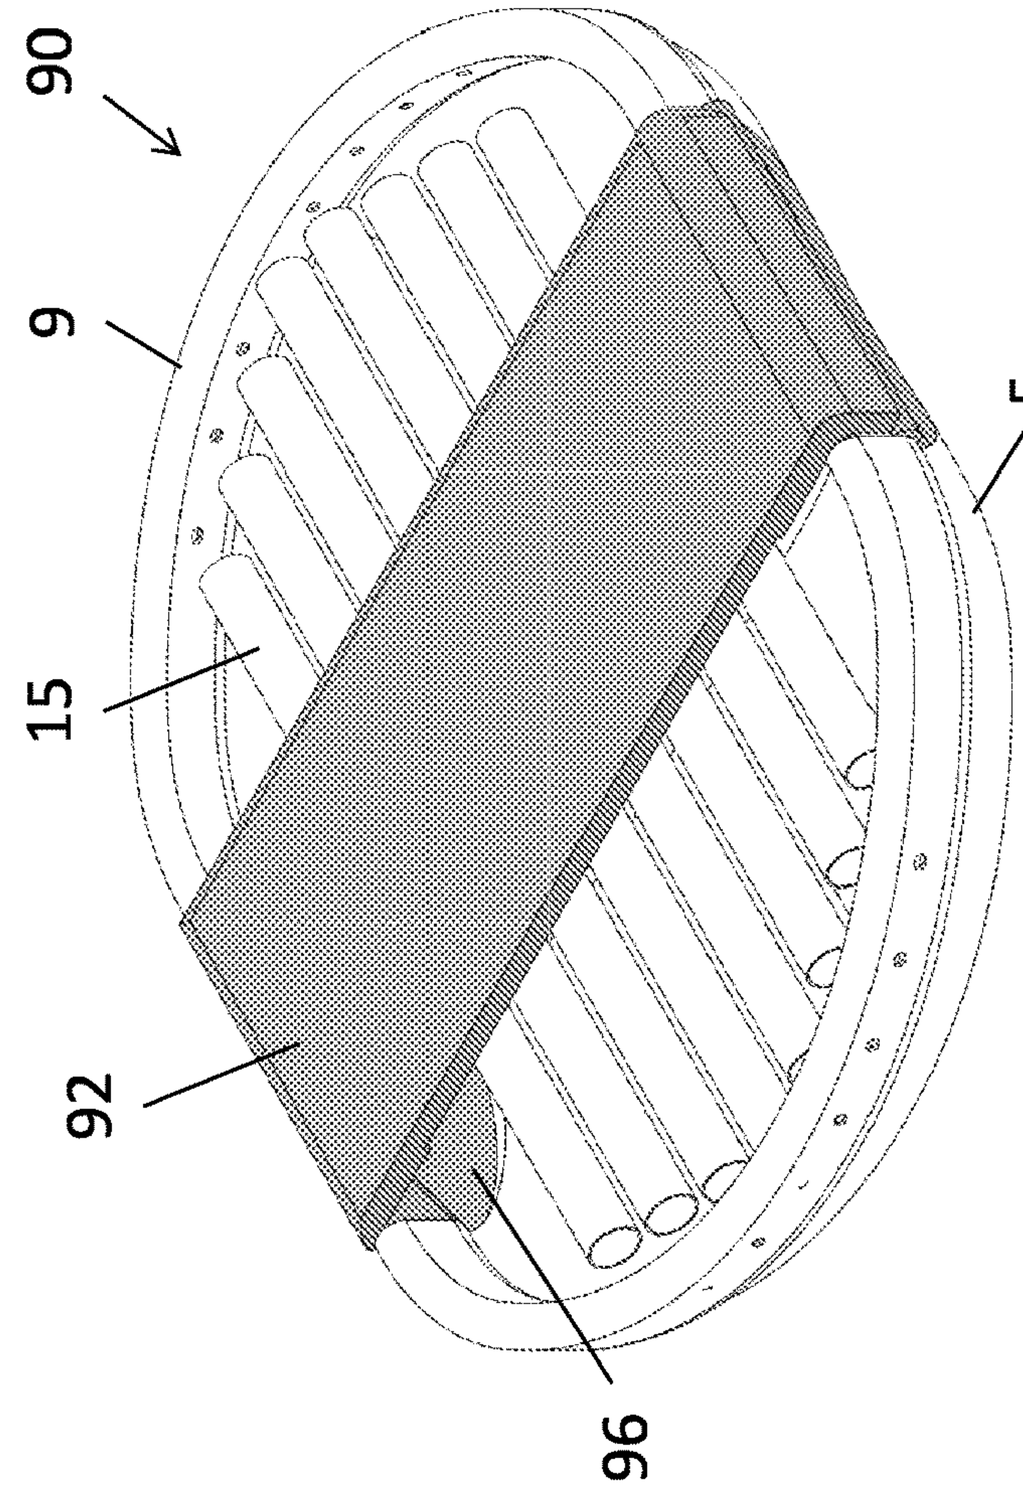


Fig. 9B

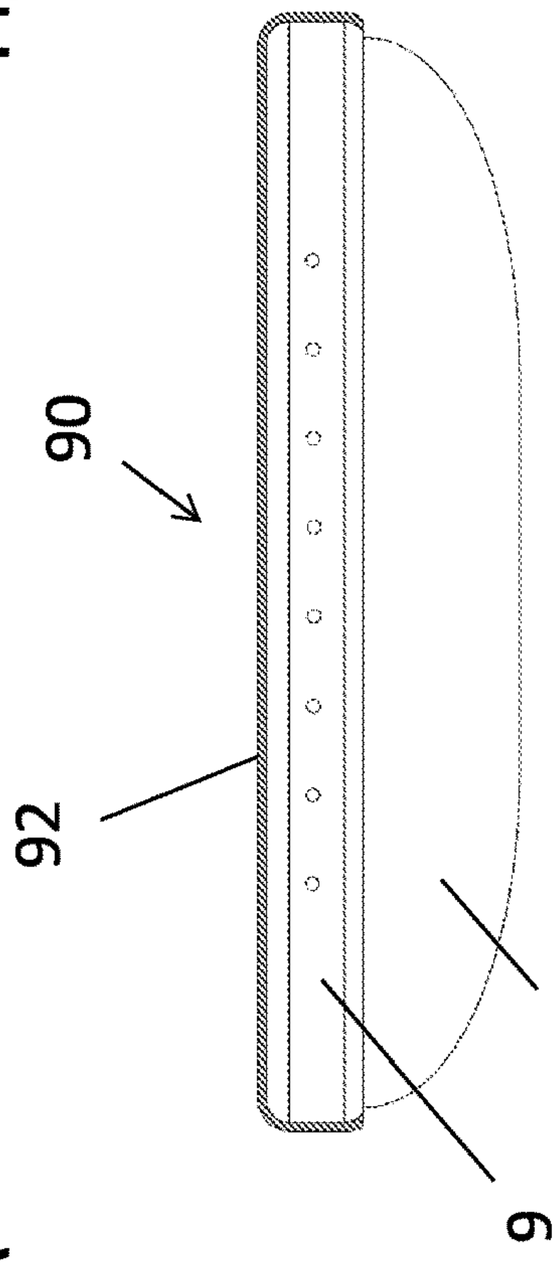


Fig. 9C

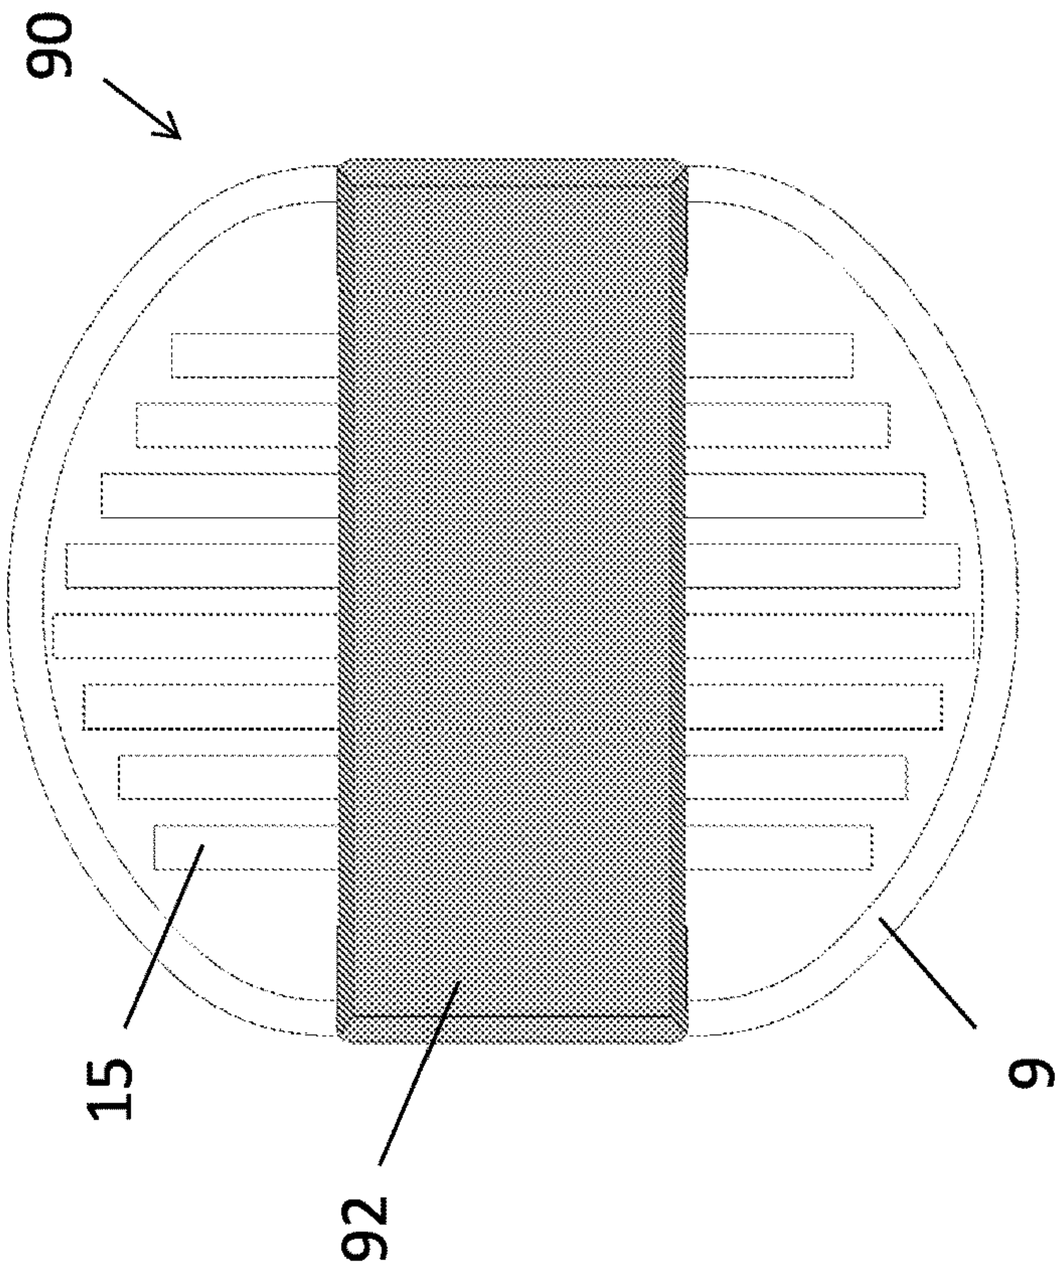


Fig. 9A

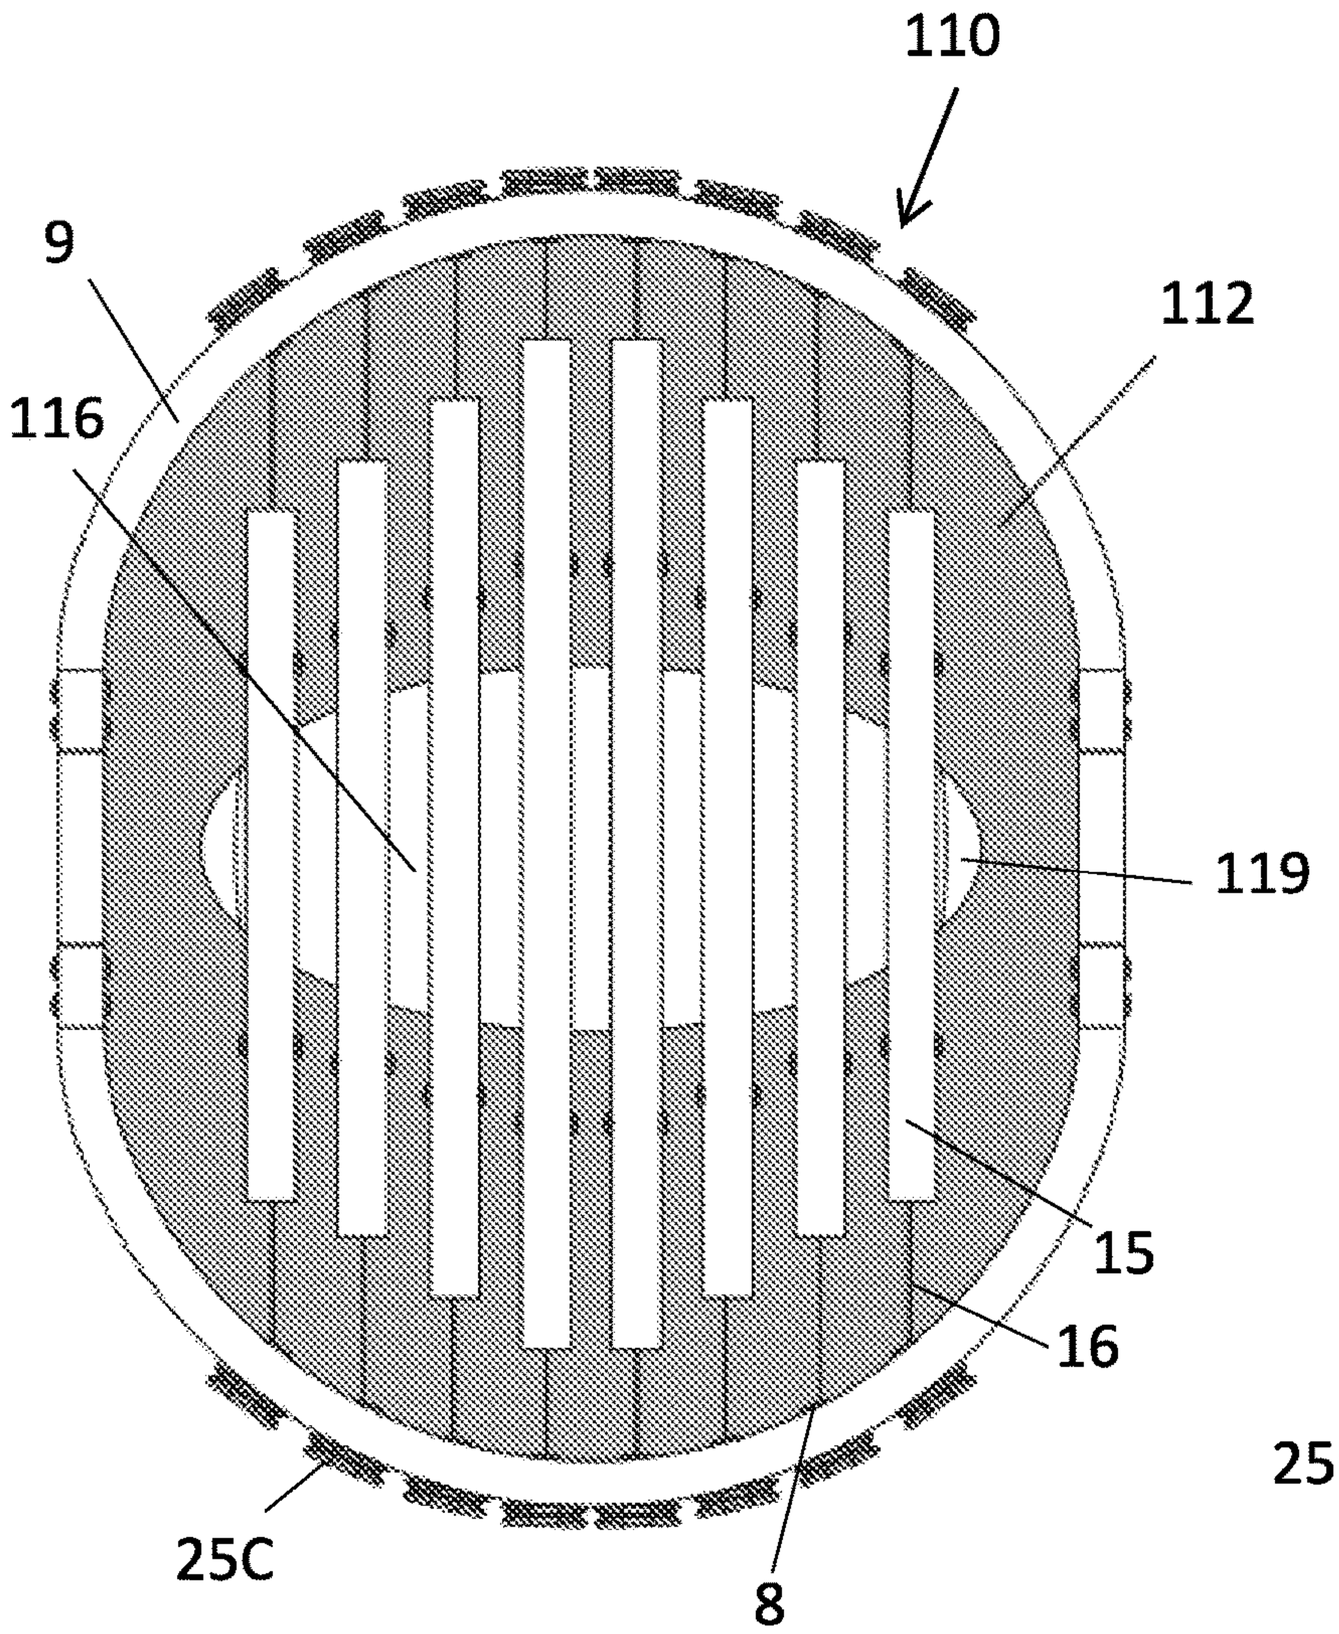


Fig. 10A

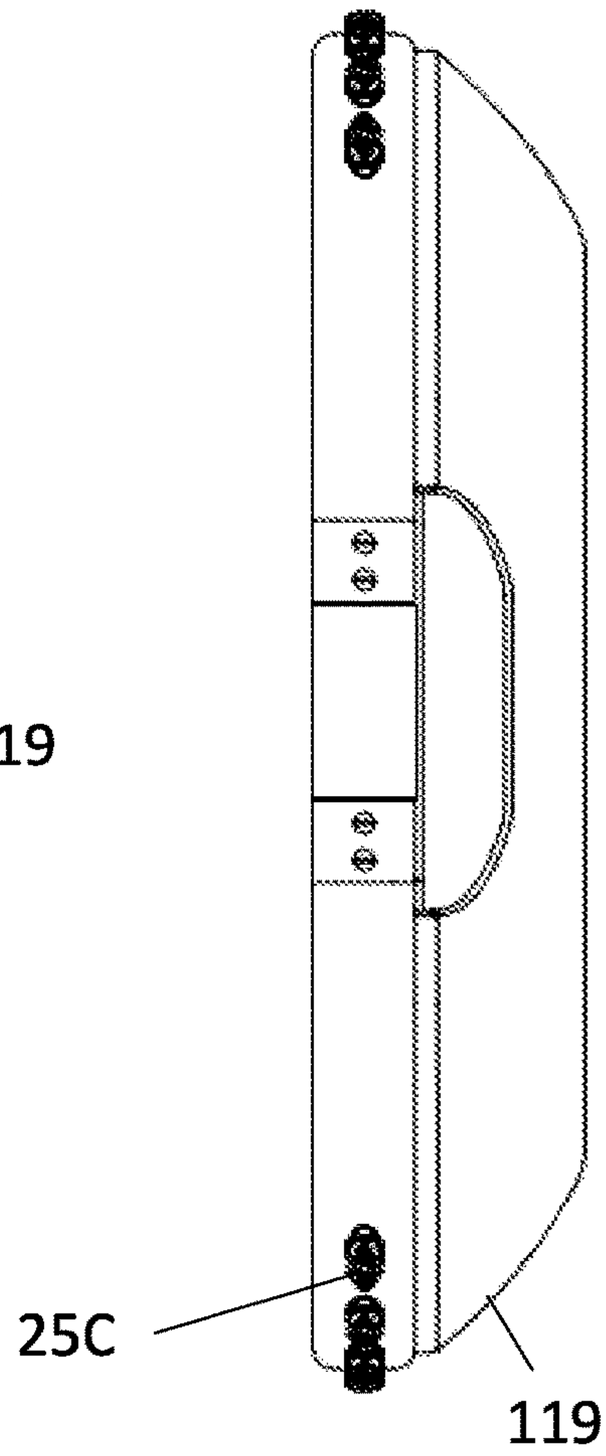


Fig. 10C

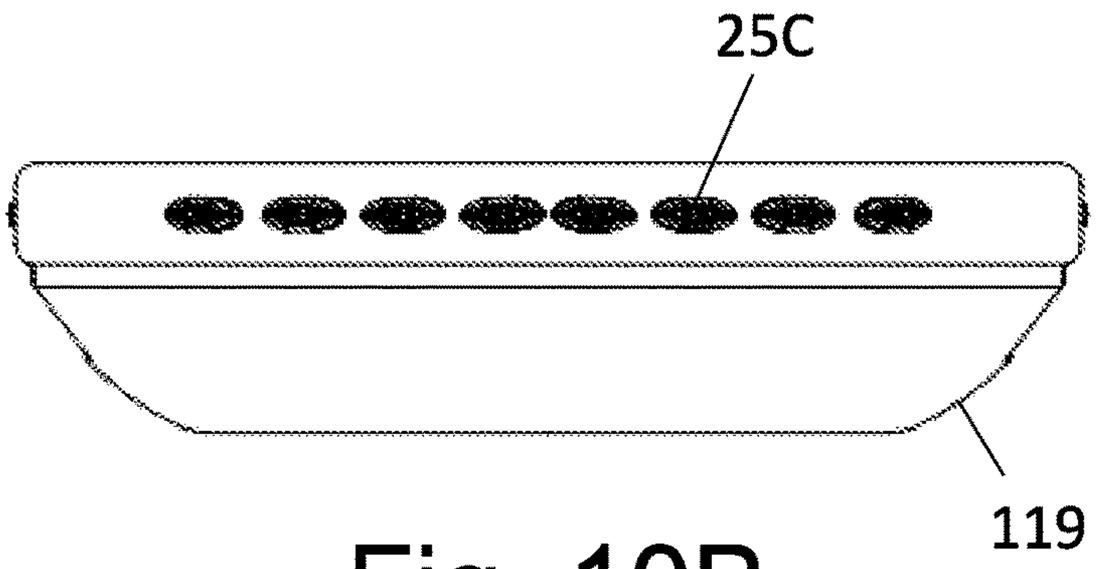


Fig. 10B

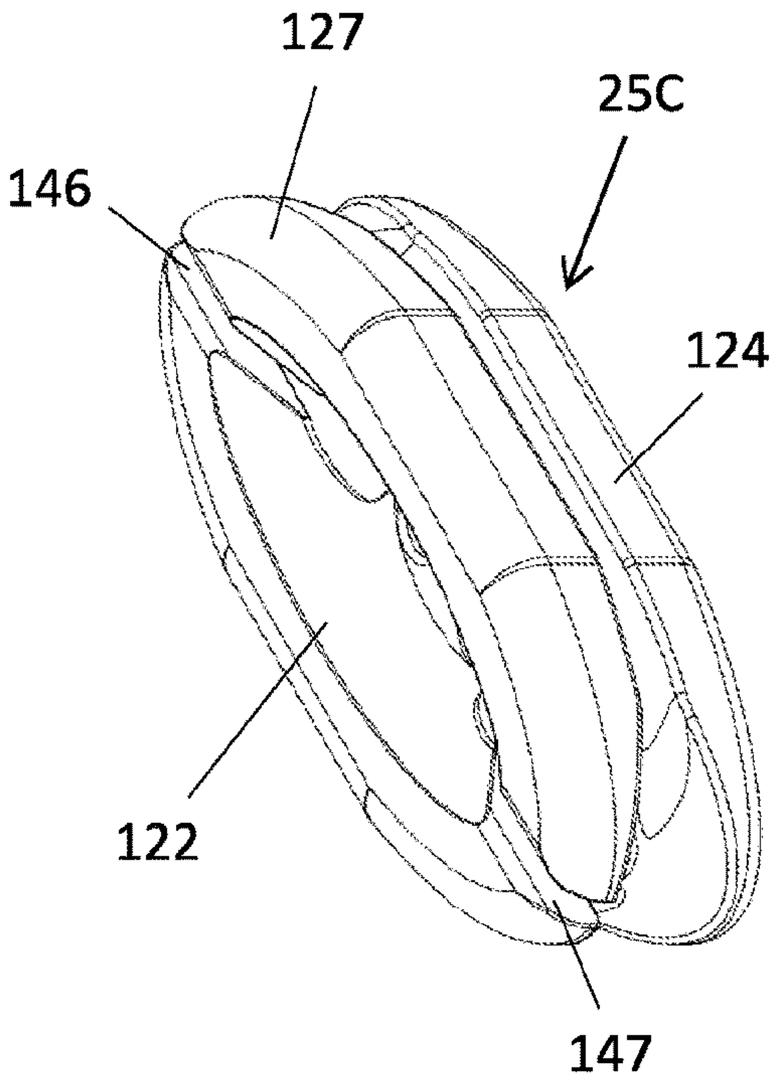


Fig. 11A

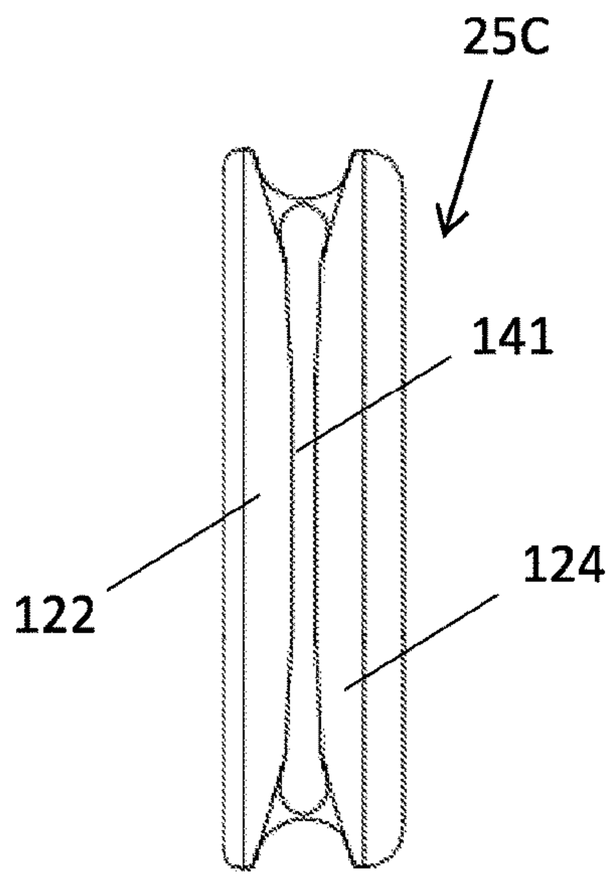


Fig. 11B

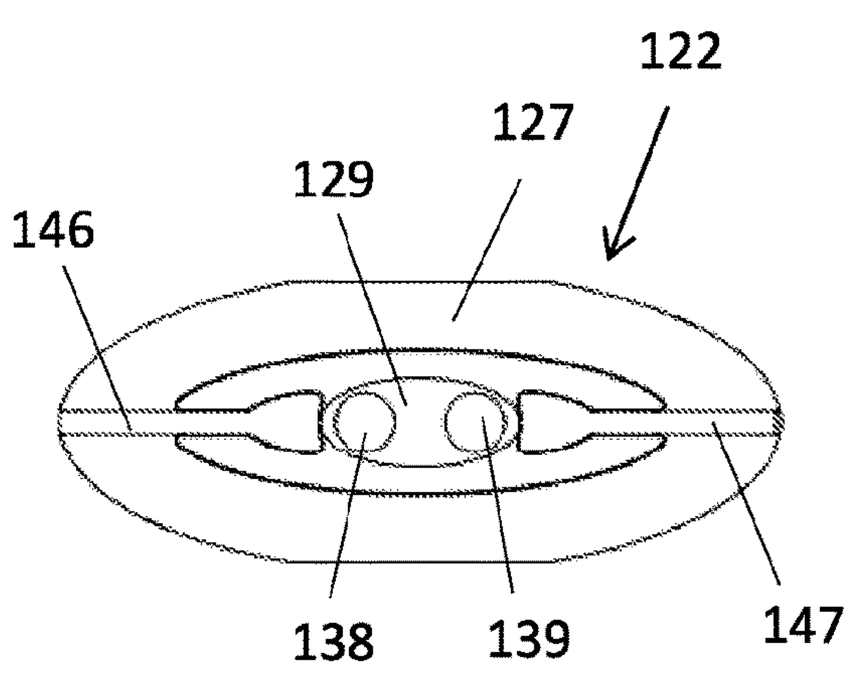


Fig. 11C

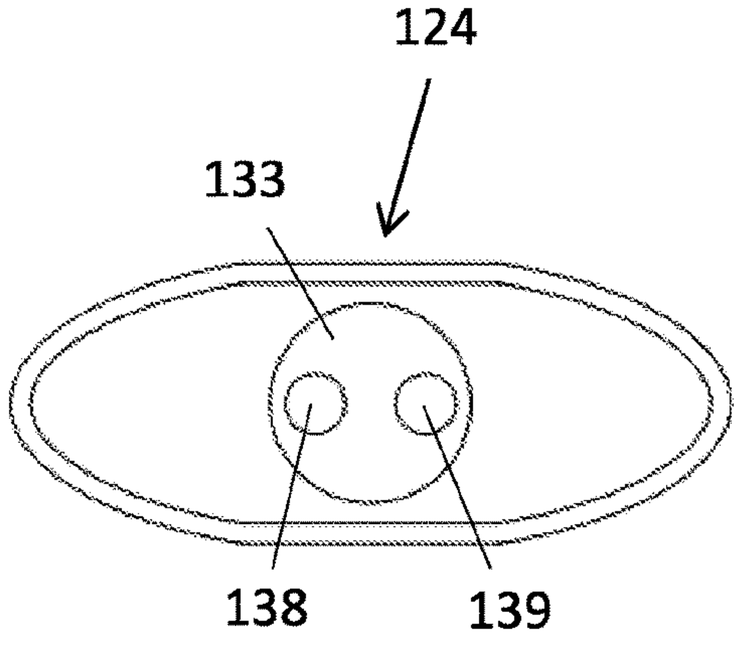


Fig. 11D

REVERBERATING PERCUSSION INSTRUMENT

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a U.S. national phase filing under 35 U.S.C. § 371 of PCT/IL2019/050220 filed on Feb. 27, 2019 and entitled "A REVERBERATING PERCUSSION INSTRUMENT," which claims priority to Israeli Patent Application number 257804 filed on Feb. 28, 2018, the disclosures of which are incorporated herein by reference in their entirety.

FIELD OF THE INVENTION

The present invention relates to the field of musical instruments. More particularly, the invention relates to a reverberating percussion instrument.

BACKGROUND OF THE INVENTION

Some reverberating percussion instruments are known, such as gongs and bells; however, they do not produce a distinct pitch and therefore do not serve harmonic functions in music, restricting their use in playing a melody.

The Kailani instrument, which has an open hexagonal, outer peripheral support in which are mounted a plurality of tubes of different lengths, is a prior art reverberating percussion instrument of the idiophone type. However, each of the tubes is mounted by a filament fixedly attached to the support and to a pin welded to the interior of the tube and is therefore not tunable and not readily replaceable. Also, the open nature of the peripheral support limits the duration of each reverberation, and also results in omnidirectional reverberations which are generally directed away from the audience listening to the played music.

GB 597283 and U.S. Pat. No. 9,330,644 also disclose pitched reverberating percussion instruments of the idiophone type which produce reverberations of limited duration.

It is an object of the present invention to provide a reverberating idiophone that produces pitched reverberations of a longer duration than that of the prior art.

It is an additional object of the present invention to provide a reverberating idiophone that produces pitched reverberations of a specific directivity.

It is an additional object of the present invention to provide a reverberating idiophone that is readily tunable.

Other objects and advantages of the invention will become apparent as the description proceeds.

SUMMARY OF THE INVENTION

The present invention provides a reverberating percussion instrument for producing long-duration pitched reverberations, comprising a resonating chamber of a completely smoothly contoured configuration to facilitate generation of long-duration pitched reverberations, and a plurality of hollow and substantially mutually parallel vibratable tubes of different lengths, each of which being suspended from an element of said resonating chamber by a tensioned filament at each longitudinal end thereof, wherein reverberated and resonating musical sounds are directed forwardly from said resonating chamber in response to selective vibration of one or more of said tubes.

The resonating chamber is preferably of a completely rounded periphery, such as being concave, is rearwardly positioned, and is configured with a peripheral and forwardly projecting support frame from which the plurality of vibratable tubes are suspended.

In one embodiment, the percussion instrument further comprises a tensioning system for tensioning the filament on which each vibratable tube is suspended. The percussion instrument comprises a tensioning device positioned externally to, and in movable engagement with, the resonating chamber support frame, a support post adapted to be releasably fixed within an interior of a corresponding vibratable tube, at one longitudinal end thereof, and a fastener for releasably fixating said support post to the support frame, wherein a corresponding filament fed through an aperture formed in the support frame is connected to said tensioning device and is adapted to be wound about said support post.

In one embodiment, the percussion instrument further comprises a vibrating elastic membrane which is stretched over the resonating chamber support frame, facilitating operation in a membranophone mode, an idiophone mode or in a combined membranophone and idiophone mode.

In one embodiment, the percussion instrument further comprises a plate fixed to the support frame, at a region thereof which is rearwardly spaced from the vibratable tubes and is forwardly spaced from the concave surface of the resonating chamber, to define a soundbox therebetween. A single aperture may be formed in the plate, to serve as a sound hole for the soundbox.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

FIG. **1** is a perspective view from above of a reverberating percussion instrument, according to one embodiment of the present invention;

FIG. **2** is a perspective view from above of the instrument of FIG. **1**, shown without the vibratable tubes;

FIG. **3**A is a perspective, cross-sectional view of a portion of the instrument of FIG. **1**, showing a filament tensioning system;

FIG. **3**B is a transparent, perspective view of a longitudinal end of a vibratable tube, showing a post used in conjunction with the filament tensioning system of FIG. **3**A being in fixated relation with the tube;

FIG. **4** is a perspective view of a support post used in conjunction with the tensioning system of FIG. **3**A;

FIGS. **5**A and **5**B are two perspective views from different sides, respectively, of a tensioning device used in conjunction with the tensioning system of FIG. **3**A;

FIGS. **6**A and **6**B are two perspective views from different sides, respectively, of another tensioning device used in conjunction with the tensioning system of FIG. **3**A;

FIG. **7** is a perspective view from above of a reverberating percussion instrument, according to another embodiment of the invention;

FIG. **8** is a top view of a reverberating percussion instrument, according to another embodiment of the invention;

FIG. **9**A is a top view of a reverberating percussion instrument, according to another embodiment of the invention;

FIG. **9**B is a perspective view from above of the instrument of FIG. **9**A;

FIG. **9**C is an end view of the instrument of FIG. **9**A;

FIG. **10**A is a top view of a reverberating percussion instrument, according to another embodiment of the invention;

FIG. **10**B is an end view of the instrument of FIG. **10**A;

FIG. **10**C is a side view of the instrument of FIG. **10**A;

FIG. **11**A is a perspective view from the front of another embodiment of a tensioning device;

FIG. **11**B is a top view of the tensioning device of FIG. **11**A; and

FIGS. **11**C and **11**D are a view from two different sides, respectively, of the tensioning device of FIG. **11**A.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is a novel reverberating percussion instrument of the idiophone type for producing average long-duration musical sound reverberations of approximately 40 seconds or more, e.g. 45 seconds. The reverberating percussion instrument has a rear resonating chamber to direct the produced reverberated musical sounds in a specific direction.

FIG. **1** illustrates reverberating percussion instrument (hereinafter referred to as the "instrument" for brevity), generally indicated by numeral **10**, according to one embodiment of the present invention. Instrument **10** comprises resonating chamber **5**, a plurality of hollow and substantially mutually parallel tubes **15** of different lengths, e.g. made of aluminum, which are suspended from a peripheral and forwardly projecting support frame **9** of resonating chamber **5** by a tensioned filament **16**, e.g. made of polyester or Kevlar, at each longitudinal end of a tube and fed through an aperture **8** formed in support frame **9**, and a tensioning device **25** at each longitudinal end of a corresponding tube **15**, only two tensioning devices **25** being shown for purposes of clarity. Eight tubes **15** are shown to define the tones of a musical scale, although any other number of tubes may be employed.

The tubes **15** struck by a dedicated striking device, such as a mallet, e.g. having a soft head made of silicon, vibrate, and may also move longitudinally depending on the tension of the filaments, to produce a specific pitch. The acoustic waves emanating from the vibrating tubes are received within the enclosed space of resonating chamber **5**, which then reverberate in response to the large number of successive reflections that reflect from a resonating chamber surface, so that the reverberated musical sounds continue after termination of the initial percussed sound and then decay after being absorbed by the resonating chamber surface.

Resonating chamber **5** has a concave and completely smoothly contoured configuration that resists, or completely eliminates, any dampening and diffusing effects which are characteristic of the influence of discontinuities found in prior art instruments and that enhances acoustic resonance in conjunction with the resonant frequencies of the various tubes **15**. As acoustic resonance is produced within resonating chamber **5** due to the presence of reverberation-derived standing waves, each tube **15** may be suspended at the location of an aperture **8** corresponding to a calculated nodal point at which the amplitude of the standing wave is a minimal value. The vibration of tubes **15** may be advantageously maximized when the tubes are suspended in this fashion.

Resonating chamber **5** may have a single concave surface, e.g. made from bamboo, from which the acoustic waves reflect to produce the pitched reverberations. Alternatively, resonating chamber **5** may be comprised of a plurality of sections which are suitably interconnected to facilitate long-duration pitched reverberations. The interconnecting elements, which may be concealed, may be rigid, flexible, adhesively or sewably connected, fixed or replaceable.

When rearward resonating chamber **5** is comprised of a plurality of sections, as shown in FIG. **2**, each section may be made of a different material in order to pinpoint desired reverberation characteristics. For example, four concave sections **11-14** may be interconnected to define a composite, rounded resonating chamber surface. Each support frame portion forwardly projecting from a corresponding concave section may also be made from a different material in order to pinpoint desired reverberation characteristics. For example, support frame portions **2-3** and **6-7** are metallic, e.g. made from aluminum, and both support frame portion **18** interposed between portions **3** and **7** and support frame portion **19** interposed between portions **2** and **6** constituting handles may be wooden for ease in manipulating the instrument. A portion of each concave section **11-14** may be provided with a cutout, or may be preformed, to define an opening **23** which assists in grasping the handle. Various accessories such as a microphone may be attached to one or more of the handles.

Also, an additional tone-controlling layer provided with dedicated acoustic material may be affixed to each of sections **11-14**, while preferably retaining the concavity of resonating chamber **5**. The tone-controlling layer may be uniform, or alternatively may be spatially specific in a surrounding matrix. For example, a portion of the tone-controlling layer may be made of sound dampening material or sound absorbing material positioned below all of the tubes or below specific tubes.

Each of the support frame portions may be substantially perpendicular to the forward border **17** of each concave section for ease in feeding a tensionable filament through a corresponding aperture **8**, although any other suitable disposition is also within the scope of the invention.

The concave and completely smoothly contoured resonating chamber advantageously imparts the instrument with surprisingly high mechanical strength that is resistant to mechanical damage caused by impact or to an excessive force applied by a performer to the support frame. The relatively large interior of the resonating chamber facilitates positioning of the vibratable tubes therewithin, while not protruding from, and being protected by, the support frame.

The compact instrument configuration promotes portability, and also permits shorter tube lengths to be employed relative to the prior art Kailani instrument in order to generate the same pitch, for example the 440-Hz Stuttgart pitch. Exemplary dimensions of the instrument are a maximum length of 57 cm, a maximum width of 49 cm and a maximum depth of 11 cm.

The instrument may be comfortably positioned on the lap of the performer, to facilitate for example two-handed playing. Alternatively, the instrument may be substantially vertically oriented, for example while supported on a stand, to direct the produced reverberated musical sounds towards the audience listening to the performer, or positioned in any other desired fashion.

In another embodiment, the instrument is converted to a membranophone by means of a vibrating elastic membrane, e.g. made of Lycra®, which is stretched over the resonating chamber support frame.

As shown in FIG. **7**, instrument **70** comprises an elastic membrane **72** which is stretched over the entire resonating chamber support frame. Membrane **72** may be selectively struck by a dedicated striking device or by the hands of a

performer without striking the vibratable tubes, to produce a tuned pitched sound in conjunction with resonating chamber **5**.

Instrument **80** illustrated in FIG. **8** has an elastic membrane **82** similar to elastic membrane **72** of FIG. **7**, but formed with a central aperture **86**, e.g. elliptical, by which the plurality of suspended vibratable tubes **15** may be accessed. Instrument **80** may be played in a membranophone mode by which only membrane **82** is caused to vibrate, while the produced sound is different than produced by instrument **70** of FIG. **7** as a result of the presence of aperture **86**. Alternatively, instrument **80** may be played in an idiophone mode by which only tubes **15** are caused to vibrate, while the produced sound is modified, such as by being dampened, by membrane **82**. Instrument **80** may also be played in a combined mode by striking, or otherwise interacting with, membrane **82** in such a way that one or more tubes **15** are also caused to vibrate, to produce acoustic resonance in conjunction with both the sound produced by tubes **15** and by the sound produced by membrane **82**.

Instrument **90** illustrated in FIGS. **9**A-C has an elongated elastic membrane **92** which is stretched over a portion of resonating chamber support frame **9**, to selectively modify the long-duration pitched reverberations generated by the vibratable tubes **15**. Elongated membrane **92** may be stretchedly secured to the handles of support frame **9**, after the longitudinal ends thereof **96** are introduced into the corresponding handle-proximate opening **23** (FIG. **2**) formed in the concave surface of resonating chamber **5** and are attached by Velcro® elements to the rearward face of elongated membrane **92**. Elongated membrane **92**, after being stretchedly secured to the handles, may be separated from support frame **9** by a small distance of approximately 1 cm, to facilitate sound generation in a membranophone mode, an idiophone mode or in a combined mode.

FIGS. **3**A-B illustrate a user-friendly tensioning system **30** for tensioning the filament **16** on which each vibratable tube **15** is suspended, in order to achieve a desired tone.

Tensioning system **30** comprises tensioning device **25** positioned externally to, and in movable engagement with, the resonating chamber support frame **9**, support post **35** adapted to be releasably fixed within the interior **21** of a vibratable tube **15**, at one longitudinal end thereof, a corresponding filament **16** extending to both tensioning device **25** and support post **35** and adapted to be wound by one or more turns about support post **35**, and fastener **42** for releasably fixating support post **35**. Two diametrically opposite bores are formed in the wall of vibratable tube **15**, allowing support post **35** to be substantially perpendicular to the longitudinal axis **29** of vibratable tube **15**. The two bores may be formed at the sides of a tube **15** which are proximate to an adjacent tube, or, alternatively, may be formed in forward and rearward portions, respectively, of the tube wall so that fastener **42** inserted through the forward bore will be accessible to the user.

As shown in FIG. **4**, support post **35** has a tubular periphery **32** extending perpendicularly from base **31**, e.g. circular, although the invention is also applicable to other cross sectional configurations. A central recessed region **37** is defined between first thickened portion **38** and second thickened portion **39** and is recessed from tubular periphery **32**. First thickened portion **38** is insertable through the second bore, which has a diameter only slightly larger than base **31**. Fastener **42** is inserted through the first bore, which may be considerably smaller than the second bore, is theadedly attached to the inner wall **44** of first portion **38**, or attached thereto by any suitable means well known to those skilled in the art, in order to immobilize support post **35**. The length of support post **35** may be such that first portion **38** contacts the inner face of the tube wall and base **31** is received within, and surrounded by the wall of, the second bore, in order to provide additional means of movement restriction.

The height of central recessed region **37** between first portion **38** and second portion **39** is only slightly greater than the thickness of the wound filament, to prevent unwanted filament movement. The filament may be continuously wrapped around central recessed region **37** by a partial turn, as shown in FIG. **3**A. Alternatively, one end of the filament may be tied to a different portion thereof after being slightly wound about recessed region **37**, to prevent filament separation, while allowing the filament to wound by a plurality of turns about recessed region **37**. Central recessed region **37** preferably coincides with the longitudinal axis **29** of vibratable tube **15**, to ensure that all vibratable tubes will remain in a mutually parallel orientation even when longitudinally displaced during a tensioning operation.

One embodiment of a tensioning device **25**A is illustrated in FIGS. **5**A-B. Tensioning device **25**A has two mutually parallel elliptical sections **52** and **54** and an interconnecting reel (not shown) of reduced dimensions therebetween about which the tensionable filament is able to be wound. A slotted guide **57** is formed in section **54** to guide the filament to the reel. A through-hole **59** to assist in connecting the filament to tensioning device **25**A and also functioning as a center of rotation is formed within elliptical sections **52** and **54** and the reel, preferably at the intersection of the major and minor axes of the elliptical sections, or at any other convenient region.

As shown in FIGS. **1** and **3**A, the tensioning device is positioned such that the elliptical sections are at an angle to resonating chamber support frame **9**, such as at a perpendicular disposition thereto. At this disposition, the filament exiting an aperture **8** of support frame **9** is able to be wound onto, or unwound from, the spool in order to achieve a desired filament tension. If the filament tension is not optimal, as evidenced by the pitch emitted by the corresponding vibratable tube, the tensioning device is rotated about through-hole **59** until the desired tension is achieved. Thus the instrument may be controllably and satisfactorily tuned.

During rotation of tensioning device **25**A, the rounded peripheral surface **56** of an elliptical section slidably engages support frame **9** to facilitate continuous and unhindered rotation. Following cessation of a tensioning operation, a region of rounded peripheral surface **56**, particularly the rounded tip **59** coinciding with the major axis and having a smallest radius of curvature, is engaged with support frame **9** by localized pressure to resist reverse rotation of the elliptical section and slackening of the filament.

Alternatively, tensioning device **25**A is positioned such that the elliptical sections are parallel to resonating chamber support frame **9** such that a wide-area region of one of the elliptical sections, for example section **52**, is flush and in movable engagement with support frame **9**, to resist reverse rotation, similar to the arrangement shown in FIGS. **10**A-C. The filament exiting an aperture **8** of support frame **9** is fed through through-hole **59** to elliptical section **54**, directed through slotted guide **57** to the reel, and is wound thereabout after being tied.

The elliptical sections, together with rounded peripheral surface **56**, have an ergonomic shape that can be comfortably embraced in the palm or contacted by the fingers of a user while being rotated.

If it desired to replace a vibratable tube, if damaged or to generate a different pitched sound with a different material or with a different sized tube, the tube is easily removable by first detaching the accessible, forwardly positioned fastener **42**, removing post **35** from the tube interior and separating filament **16** from central recessed region **37**.

A similar tensioning device **25**B with elliptical sections **62** and **64**, but with two through-holes **68** and **69** is illustrated in FIGS. **6**A-B.

Instrument **110** illustrated in FIGS. **10**A-C has a thin plate **112**, generally planar, which is fixed to support frame **9**, at a region thereof which is sufficiently rearwardly spaced from the apertures **8** to prevent interference with the vibratable tubes **15** or with the filaments **16**, each of which is connected to a corresponding tensioning device **25**C positioned externally to support frame **9**. Plate **112** is spaced from the concave surface **119** of the resonating chamber, which may be formed of a plurality of sections, to define a soundbox therebetween. Plate **112**, which may be hard, e.g. made from bamboo, or alternatively may be relatively soft, is adapted to vibrate at a broad range of low frequencies, e.g. 100-500 Hz.

A single aperture **116** is formed in plate **112**, and serves as a sound hole for the soundbox by which the vibrational energy produced by the tubes **15** is transmitted to the air within the resonating chamber. The soundbox in turn in turn radiates the received vibrational energy as audible reverberating sound. The sound waves emitted from the soundbox are of an opposite phase as the sound waves incoming from the vibrating tubes **15**, so that the emitted sound waves will interfere destructively with the incoming waves and cause the incoming waves to attenuate.

The sound emitted by instrument **110**, resulting from the generated pitches and overtones, which may be acoustically amplified, may be pinpointed by selecting the size, shape and relative location of aperture **116**, as well as the material and thickness of plate **112** and concave surface **119** and the distance therebetween.

The configuration of tensioning device **25**C is illustrated in FIGS. **11**A-D. The two elliptical sections **122** and **124** are shown to have a thickened periphery **127** adapted to engage the support frame. Within a plate **129** recessed with respect to periphery **127** in elliptical section **122** are formed two through-holes **138** and **139** through which the filament is fed. A differently shaped plate **133** is formed with the same through-holes in elliptical section **124**. The filament is wound about reel **141** positioned between and shorter than elliptical sections **122** and **124**. While elliptical section **122** has slotted guides **146** and **147** to guide the filament to reel **141**, elliptical section **124** is unslotted.

While some embodiments of the invention have been described by way of illustration, it will be apparent that the invention can be carried out with many modifications, variations and adaptations, and with the use of numerous equivalents or alternative solutions that are within the scope of persons skilled in the art, without exceeding the scope of the claims.

The invention claimed is:

1. A reverberating percussion instrument for producing long-duration pitched reverberations, comprising a resonating chamber of a completely smoothly contoured configuration to facilitate generation of long-duration pitched reverberations, and a plurality of hollow and substantially mutually parallel vibratable tubes of different lengths, each of which being suspended from an element of said resonating chamber by a tensioned filament at each longitudinal end thereof, wherein reverberated and resonating musical sounds are directed forwardly from said resonating chamber in response to selective vibration of one or more of said tubes.

2. The percussion instrument according to claim **1**, wherein the resonating chamber is of a completely rounded periphery.

3. The percussion instrument according to claim **2**, wherein the resonating chamber is concave and rearwardly positioned, and is configured with a peripheral and forwardly projecting support frame from which the plurality of vibratable tubes are suspended.

4. The percussion instrument according to claim **3**, wherein each of the plurality of vibratable tubes is suspended at a location of the support frame corresponding to a calculated nodal point of a reverberation-derived standing wave at which the amplitude of the standing wave is a minimal value.

5. The percussion instrument according to claim **3**, wherein the resonating chamber has a single concave surface from which acoustic waves reflect to produce long-duration pitched reverberations.

6. The percussion instrument according to claim **5**, further comprising a plate fixed to the support frame, at a region thereof which is rearwardly spaced from the vibratable tubes and is forwardly spaced from the concave surface of the resonating chamber, to define a soundbox therebetween.

7. The percussion instrument according to claim **6**, wherein a single aperture is formed in the plate, to serve as a sound hole for the soundbox.

8. The percussion instrument according to claim **3**, wherein the resonating chamber is comprised of a plurality of interconnected sections to facilitate generation of long-duration pitched reverberations.

9. The percussion instrument according to claim **3**, further comprising a tensioning system for tensioning the filament on which each vibratable tube is suspended.

10. The percussion instrument according to claim **9**, wherein the tensioning system comprises a tensioning device positioned externally to, and in movable engagement with, the resonating chamber support frame, a support post adapted to be releasably fixed within an interior of a corresponding vibratable tube, at one longitudinal end thereof, and a fastener for releasably fixating said support post to the support frame, wherein a corresponding filament fed through an aperture formed in the support frame is connected to said tensioning device and is adapted to be wound about said support post.

11. The percussion instrument according to claim **3**, further comprising a vibrating elastic membrane which is stretched over the resonating chamber support frame.

12. The percussion instrument according to claim **11**, which is operable in a membranophone mode, an idiophone mode or in a combined membranophone and idiophone mode.

13. The percussion instrument according to claim **1**, which is operable to produce long-duration pitched reverberations of an average duration of approximately 40 seconds or more.

* * * * *